

Product Code

**DF341/6S**


Solid Core Filter Drier

3/4" ODS

PS = 50 bar - 680 PSI

**P**  **LYHEDRA**

**C**  **LASSIC**

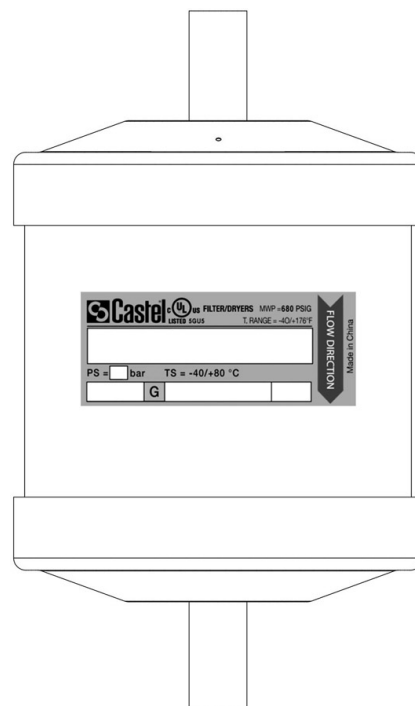

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

HC (R290, R600, R600a, R1270)

## Product details

**Codice internazionale** 416S

**Attacchi ODS Ø [in.]** 3/4"

**Attacchi ODS Ø [mm]** -

**Cubatura nominale [cm<sup>3</sup>]** 670

**PS[bar]** 50

**MWP [psi] (1)** 680

**TS[°C] min.** -40

**TS[°C] max.** +80

**Confezione n° pz** 6

## Notes

(1): in conformità a omologazione UL