

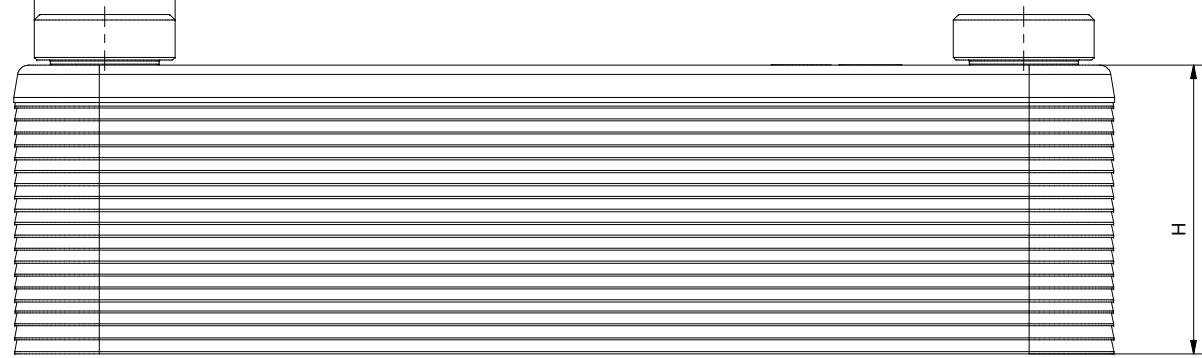


N°4 TR.3/4"G

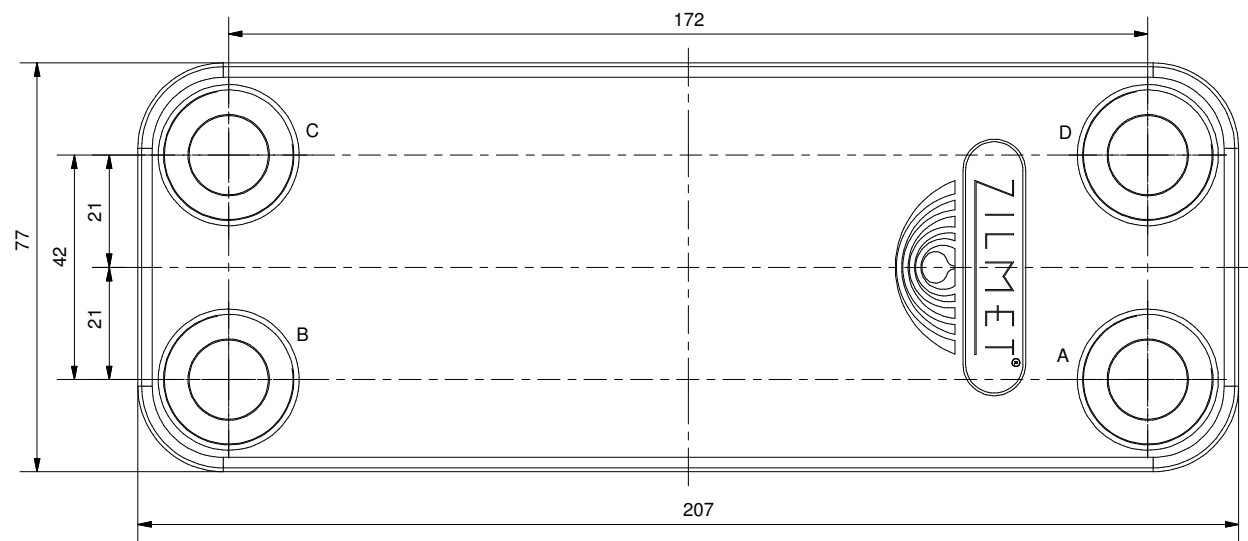


CODE	n° Plates	H
17B2071004	10	30
17B2071204	12	34
17B2071404	14	39
17B2071604	16	44
17B2071804	18	49
17B2072004	20	54
17B2072204	22	59
17B2072404	24	61
17B2072604	26	65
17B2072804	28	69
17B2073004	30	73
17B2073404	34	85
17B2074004	40	102

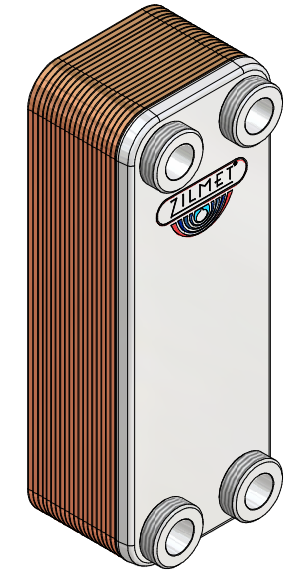

Pressione max esercizio (Max operating pressure):  
 Circuito Primario (Primary circuit): 3 bar  
 Circuito secondario (Secondary circuit): 8 bar  
 Temperatura esercizio (Max operating temperature): -10/+99°C  
 Materiale (Material): INOX AISI 316L  
 Materiale di brasatura (Brazing material): 99.9% Cu  
 Materiale raccordi (Connection material): INOX AISI 316 3/4"G

CIRCOLAZIONE FLUIDI CIRCUITO PRIMARIO ENTRATA IN C - USCITA IN D (PRIMARY CIRCUIT IN C - OUT D)  
CIRCUITO SECONDARIO ENTRTA IN A - USCITA IN B (SECONDARY CIRCUIT SANITARY IN A - OUT B)

 35010 Limena (PD) Via del Santo 242 tel.049/8840662	DIS. N° / DRAWING N° <b>ZB 207</b>			CODICE / CODE <b>17B207--04</b>
	Denominazione / Denomination <b>HEATING HEXCHANGER BRAZED</b>	Drawn	Date	
	Checked	Date	Signature	Disegno di proprietà della Zilmet S.p.A. Tutti i diritti riservati. / This drawing is property of company ZILMET S.p.a. All rights reserved.
	Approved	Date	Signature	