


# ATTACCHI RAPIDI



## ATTACCHI RAPIDI

- Permettono di aprire o chiudere automaticamente il sistema senza perdita di refrigerante.
- Eliminano fuoriuscite pericolose di refrigerante e olio dal sistema al momento dello scollegamento del tubo.
- Evitano il rischio di bruciature alle dita al momento dello scollegamento.

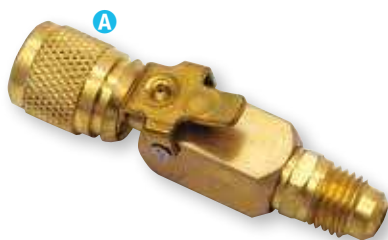

| Rif | Codice   | Modello | Descrizione  |
|-----|----------|---------|--|
| A   | 05059005 | 16 C    | Attacco rapido diritto 1/4" SAE maschio x 1/4" SAE femmina   |
| A   | 05059038 | 26 C    | Attacco rapido diritto 5/16" SAE maschio x 5/16" SAE femmina |
| B   | 05059007 | 17 C    | Attacco rapido 90° 1/4" SAE maschio x 1/4" SAE femmina       |
| B   | 05059039 | 27 C    | Attacco rapido 90° 5/16" SAE maschio x 5/16" SAE femmina     |

| Rif | Codice   | Dimensioni        | Peso    |
|-----|----------|-------------------|---------|
| A   | 05059005 | 165 x 135 x 20 mm | 0,07 kg |
| A   | 05059038 | 165 x 135 x 20 mm | 0,07 kg |
| B   | 05059007 | 165 x 135 x 20 mm | 0,07 kg |
| A   | 05059039 | 165 x 135 x 20 mm | 0,07 kg |



## Ricambi

| Codice   | Modello   | Descrizione           | Per             |    |
|----------|-----------|-----------------------|-----------------|----|
| 14020087 | S8920071  | Inserto femmina       | 16C             | 10 |
| 14020088 | S8920072  | Fermo innesto femmina | 16C             | 10 |
| 14020047 | S8920073  | Kit guarnizioni       | 16C-17C         | 10 |
| 14020022 | S8920077  | Kit o-ring            | 16C-17C-26C-27C | 10 |
| 14020023 | S8920263  | Kit o-ring 3/16"      | 19C             | 10 |
| 14020081 | S10000996 | Kit guarnizioni       | 26C-27C         | 10 |

## QUICK COUPLERS



### QUICK COUPLERS

- Allow to open or close automatically the system without loss of refrigerant.
- Eliminate hazardous discharge of refrigerant and oil from system when disconnecting hose.
- Prevent finger burn when disconnecting.



| Ref | Code     | Model | Description                       |
|-----|----------|-------|-----------------------------------|
| A   | 05059005 | 16 C  | 1/4" SAE male x 1/4" SAE female   |
| A   | 05059038 | 26 C  | 5/16" SAE male x 5/16" SAE female |
| B   | 05059007 | 17 C  | 1/4" SAE male 1/4" SAE female     |
| B   | 05059039 | 27 C  | 5/16" SAE male 5/16" SAE female   |

| Ref | Code     | Dimensions        | Weight  |
|-----|----------|-------------------|---------|
| A   | 05059005 | 165 x 135 x 20 mm | 0,07 kg |
| A   | 05059038 | 165 x 135 x 20 mm | 0,07 kg |
| B   | 05059007 | 165 x 135 x 20 mm | 0,07 kg |
| A   | 05059039 | 165 x 135 x 20 mm | 0,07 kg |



### Spare parts

| Code     | Model     | Description               | For             |  |
|----------|-----------|---------------------------|-----------------|--|
| 14020087 | S8920071  | Female coupler-sleeve     | 16C             |  |
| 14020088 | S8920072  | Female coupler-retaine    | 16C             |  |
| 14020047 | S8920073  | Female coupler-gasket kit | 16C-17C         |  |
| 14020022 | S8920077  | Female coupler-o-ring     | 16C-17C-26C-27C |  |
| 14020023 | S8920263  | Female coupler-3/16"      | 19C             |  |
| 14020081 | S10000996 | Female coupler-gasket kit | 26C-27C         |  |