


DESCRIPTION

X-DOSER is a proportional anti-scale dosing unit for boilers, water heaters, washing machines, and dishwashers that uses proven immersion pump technology, capable of ensuring perfect operation even after a prolonged absence of the anti-scale liquid. The ultra-compact dimensions, ergonomic shape, and adjustable connections make installation easy and quick on horizontal, vertical, and elbow pipes. To refill the anti-scale product, it is not necessary to shut off the water; simply unscrew the tank, pour in X-DOSER250R or X-DOSER1R, and screw the tank back on.

TECHNICAL FEATURES

CONNECTIONS		1/2" - 1/2" F
WORKING PRESSURE	bar	1,3÷6
FLOW RATE ($\Delta P = 0,5$ bar)	m ³ /h	0,18÷0,8
TANK	g	250
AVERAGE AUTONOMY	m ³	11
PUMP-TANK MATERIAL		POM-PE
MEASURES (LxHxZ)	cm	8,2x22x8 or. 8,2x24,5x8 vert.
INTERAXIS	cm	5,4 or. 3,0 vert.
WATER TEMPERATURE	°C	5-30
ROOM TEMPERATURE	°C	5-50

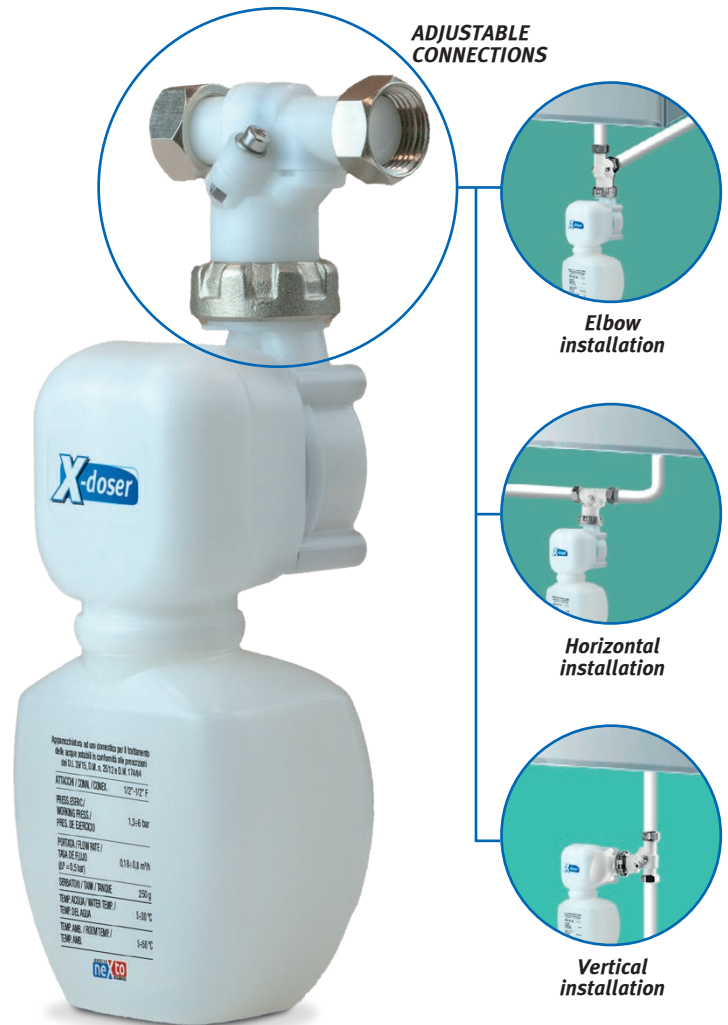

REFILL

X-DOSER250R e X-DOSER1R are ready-to-use liquid products, formulated with food grade raw materials for the anti scale treatment of boilers, heat exchangers and water systems. Regular dosing of X-DOSER250R or X-DOSER1R allows a 15-20% energy saving in time and a longer average lifetime of heat exchangers and water household appliances. X-DOSER250R is sold in a pack of 4 refills of 250 g each.

Can be used with X-DOSER and compatible models.

In accordance with: D.I. 26/06/2015; UNI-CTI 8065:2019; UNI EN 1212:2005.

X-DOSER250R


Discover X-DOSER, X-DOSER250R e X-DOSER1R on Arbo website. Click & go

X-DOSER
X-DOSER250R
X-DOSER1R