


REVISION:01
UNIT: mm



YK-03H 0118-406R305R
 OPEN: 406 ± 15 PSI
 CLOSE: 305 ± 15 PSI

 DATE CODE

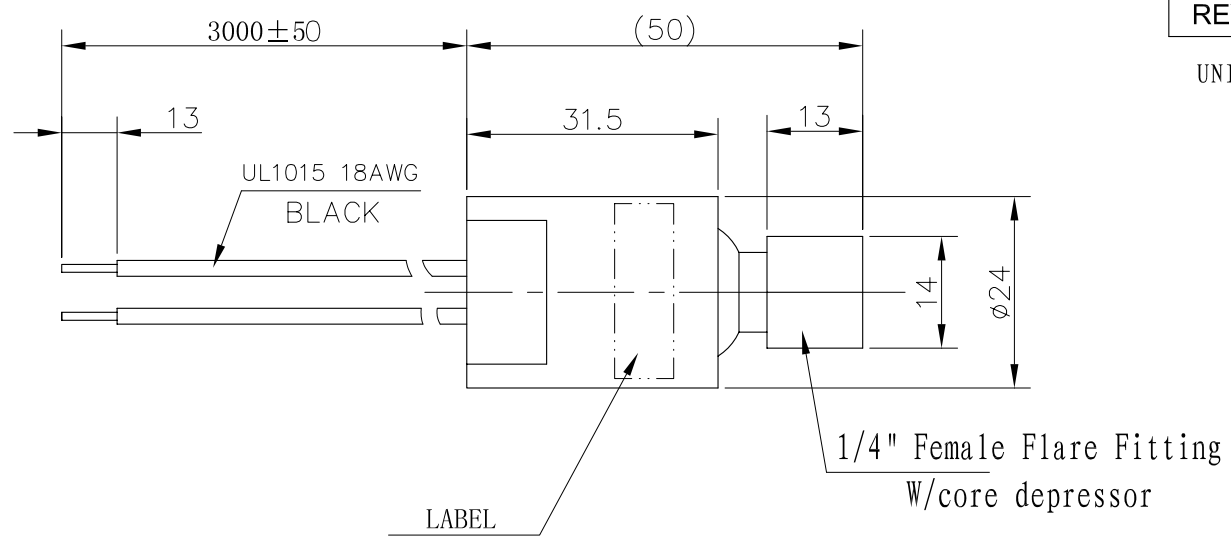

TECHNICAL SPECIFICATIONS

ACTUATION/OPEN PRESSURE	406 ± 15 PSI (28bar)								
RELEASE/CLOSE PRESSURE	305 ± 15PSI (21bar)								
PROOF PRESSURE	650 PSI								
BURST PRESSURE	5000 PSI								
TEMPERATURE RANGE	Ambient: -30°C to +80°C Fluid: -50°C to +120°C								
ELECTRICAL RATING	50/60Hz DC 36V 3A								
	<table border="0"> <tr> <td>Voltage</td> <td>Amperage (50/60Hz)</td> </tr> <tr> <td>24</td> <td>125VA pilot duty</td> </tr> <tr> <td>120</td> <td>375VA pilot duty</td> </tr> <tr> <td>240</td> <td>375VA pilot duty</td> </tr> </table>	Voltage	Amperage (50/60Hz)	24	125VA pilot duty	120	375VA pilot duty	240	375VA pilot duty
Voltage	Amperage (50/60Hz)								
24	125VA pilot duty								
120	375VA pilot duty								
240	375VA pilot duty								
DIELECTRIC STRENGTH	750 VRMS open switch 1550 VRMS terminals to fitting								
LIFE AT RATED LOAD	100,000 Cycles								
SWITCH CONFIGURATION	SPST, at atmospheric pressure: CLOSED								

CHANG  HENG®
 CHANGZHOU CHANGHENG ASIA-PACIFIC ELECTRIC APPLIANCECO., LTD.

CUSTOMER NAME:
 CUSTOMER P/N:
 CHANGHENG P/N: YK-03H 0118-406R305R

PRESSURE SWITCH DRAWING