
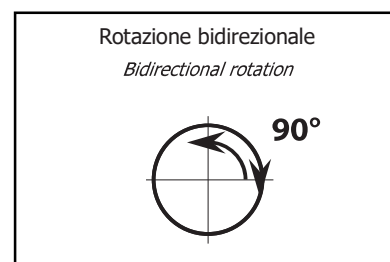


SERVOMOTORI ABBINABILI

MATCHABLE ACTUATORS

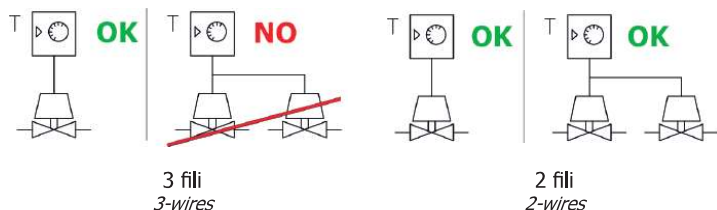

Tempo corsa <i>Running time</i>	Contatto Aux. <i>Aux. switch</i>	IP	Controllo <i>Control type</i>	Alimentazione <i>Supply</i>	Codice <i>Code</i>	Attuatori <i>Actuators</i>	
60"	1 contatto aux. <i>1 aux. switch</i>	IP54	3 fili <i>3-wires</i>	230 Vac	M7IB9	<p>Coppia Massima 12 Nm <i>Maximum Torque</i></p>	
				24 Vac	M7IC9		
			2 fili <i>2-wires</i>	230 Vac	R7IB9		
				24 Vac	R7IC9		
		IP65	3 fili <i>3-wires</i>	230 Vac	P7IB9		
				24 Vac	P7IC9		
2 fili <i>2-wires</i>	230 Vac	T7IB9					
24 Vac	T7IC9						
60"	1 contatto aux. <i>1 aux. switch</i>	IP42	3 fili <i>3-wires</i>	230 Vac	M8IB9		<p>Coppia Massima 20 Nm <i>Maximum Torque</i></p>
				24 Vac	M8IC9		
			2 fili <i>2-wires</i>	230 Vac	R8IB9		
				24 Vac	R8IC9		
		IP65 <i>(*)</i>	3 fili <i>3-wires</i>	230 Vac	M8IB9P		
				24 Vac	M8IC9P		
			2 fili <i>2-wires</i>	230 Vac	R8IB9P		
				24 Vac	R8IC9P		
	2 contatti aux. <i>2 aux. switch</i>	IP42	3 fili <i>3-wires</i>	230 Vac	M8IE9		
				24 Vac	M8IF9		
		2 fili <i>2-wires</i>	230 Vac	R8IE9			
			24 Vac	R8IF9			
IP65 <i>(*)</i>	3 fili <i>3-wires</i>	230 Vac	M8IE9P				
		24 Vac	M8IF9P				
	2 fili <i>2-wires</i>	230 Vac	R8IE9P				
		24 Vac	R8IF9P				
60"	2 contatti aux. <i>2 aux. switch</i>	IP65	3 fili <i>3-wires</i>	230 Vac	M9IB9	<p>Coppia Massima 50 Nm <i>Maximum Torque</i></p>	
				24 Vac	M9IC9		
			2 fili <i>2-wires</i>	230 Vac	R9IB9		
				24 Vac	R9IC9		

(*) IP65 SENZA COMANDO MANUALE

() IP65 WITHOUT MANUAL OVERRIDE*

DISTANZIALE PER VALVOLE MOTORIZZATE ISO <i>SPACERS FOR ISO MOTORIZED VALVES</i>	Flangia <i>Flange</i>	Codice <i>Code</i>
<p>Senza leva per comando manuale <i>Without lever for manual override</i></p>	F03 □9	K3S7
	F05 □11	K8I51
	F05 □14	K9I54
<p>Con leva per comando manuale <i>With lever for manual override</i></p>	F03 □9	K3M7
	F05 □11	DMI51
	F05 □14	DMI54