



Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.1
Rev. Date	May.28.2021

# LG Electronics Inc.

## SPECIFICATION SHEET for APPROVAL

**MODEL : GVS265PAB (Tropical)**

**CUSTOMER : EMBRITAL**

APPROVAL			
Name			
Date			
AIR CONDITIONER MODEL			

**LG Electronics Inc.**

	Designed	Checked	Approved
Name	<i>[Signature]</i>	<i>[Signature]</i>	Chitapan
Date	31 May 2021	31. May. 21	31 May. 21

**ORIGINAL**  
310521


Please read this specification sheet thoroughly before installation or operating.

Please Return 1 Copy on Your Approval.

Air Conditioning Compressor Division LG Electronics Inc.  
 Tel : (+66)38 - 923 - 109 Fax : (+66)38 - 923 - 119

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.1
Rev. Date	May.28.2021

# 0.Revision History

Date	Rev. No	Rev. description	Write
28.05.2021		<p>Page 7/13 -Change sleeve damper from P/N.4816U-L001G→4816U-L001H</p> <p>Page 13/13 Revise label format (Refer 4M Change confirm)</p> <p>Page A-8 -Change sleeve damper from P/N.4816U-L001G→4816U-L001H -Revise spec sleeve damper length from 34→37 mm (Actual spec)</p>	Thunyarat D.

Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

# 1.Specification

## 1.1 Compressor


1	Model Name	GVS265PAB
2	Compressor Type	Hermetic Motor Compressor
3	Compression Type	Rotary Type (Rolling Piston Type)
4	Application	Refrigeration system (Cooling & Heating)
5	Refrigerant	R410A
6	Safety Approval	-
7	Oil / Oil Charging Amount	PVE(FVC68D) / 540 ± 10cc
8	Displacement	26.5 cc. / rev
9	Painting	Black Color Paint
10	Net Weight ( Including Oil )	19.9 kg
11	Suction Tube I.D	Ø 16.0 mm
12	Discharge Tube I.D	Ø 9.7 mm

## 1.2 Motor

Motor Type / Starting Type	Single Phase Induction Motor / PSC	
Pole / Rated Output	2 Pole / 1,980 Watts	
Power Source	1 Ph - 220~240 Volts - 50 Hz	
Rated Revolution	2,842rpm	
Insulation Class	E Class	
Windings Resistance ( at 25 °C )	Main	1.43 ± 7% [ Ω ]
	Sub	2.22 ± 7% [ Ω ]
Locked Rotor Ampere	54 A (at 240 V)	

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

### 1.3 Wiring diagram

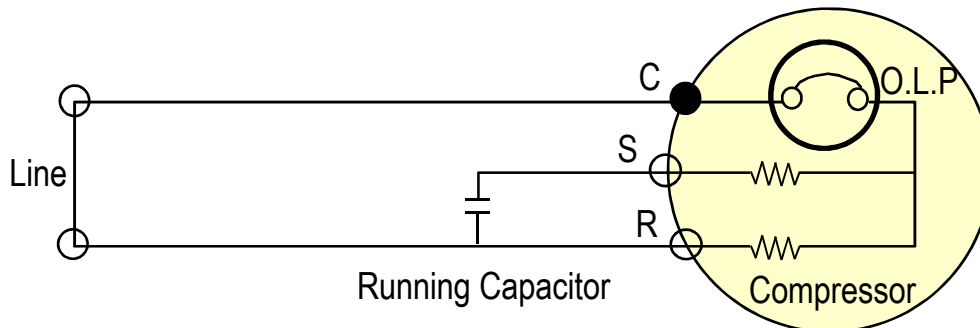

※ Make Sure to connect right way same with the wiring diagram.

### 1.4 Electrical Component

Running Capacitor	50 MFD / 400 VAC
Overload Protector	INTERNAL TYPE (UP14SE5245)

### 1.5 Performance

Voltage		220 V	240V
Cooling Capacity (-5%↑)	[ BTU/h ]	22,850	22,950
	[ W ]	6,696	6,725
Power Input (+5%↓)	[ Watts ]	2,210	2,275
EER (-5%↑)	[ BTU/w · hr ]	10.34	10.1
	[ W / W ]	3.03	2.95
Running Current	[ A ]	10.2	9.9

☞ Rated Conditions (ASHRAE-T Condition)


Cond. Temp. : 54.4 °C ( 130 °F )  
 Evap. Temp. : 7.2 °C ( 45 °F )

Return Gas Temp. : 35.0 °C ( 95 °F )  
 Liquid Temp. : 46.1 °C ( 115 °F )  
 Ambient Temp. : 35.0 °C ( 95 °F )

Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

**1.6 Noise & Vibration**

Voltage		At 240 V
Sound Level	[ dB(A) ]	74 Max
Vibration	[ $\mu\text{m}$ ]	230 Max

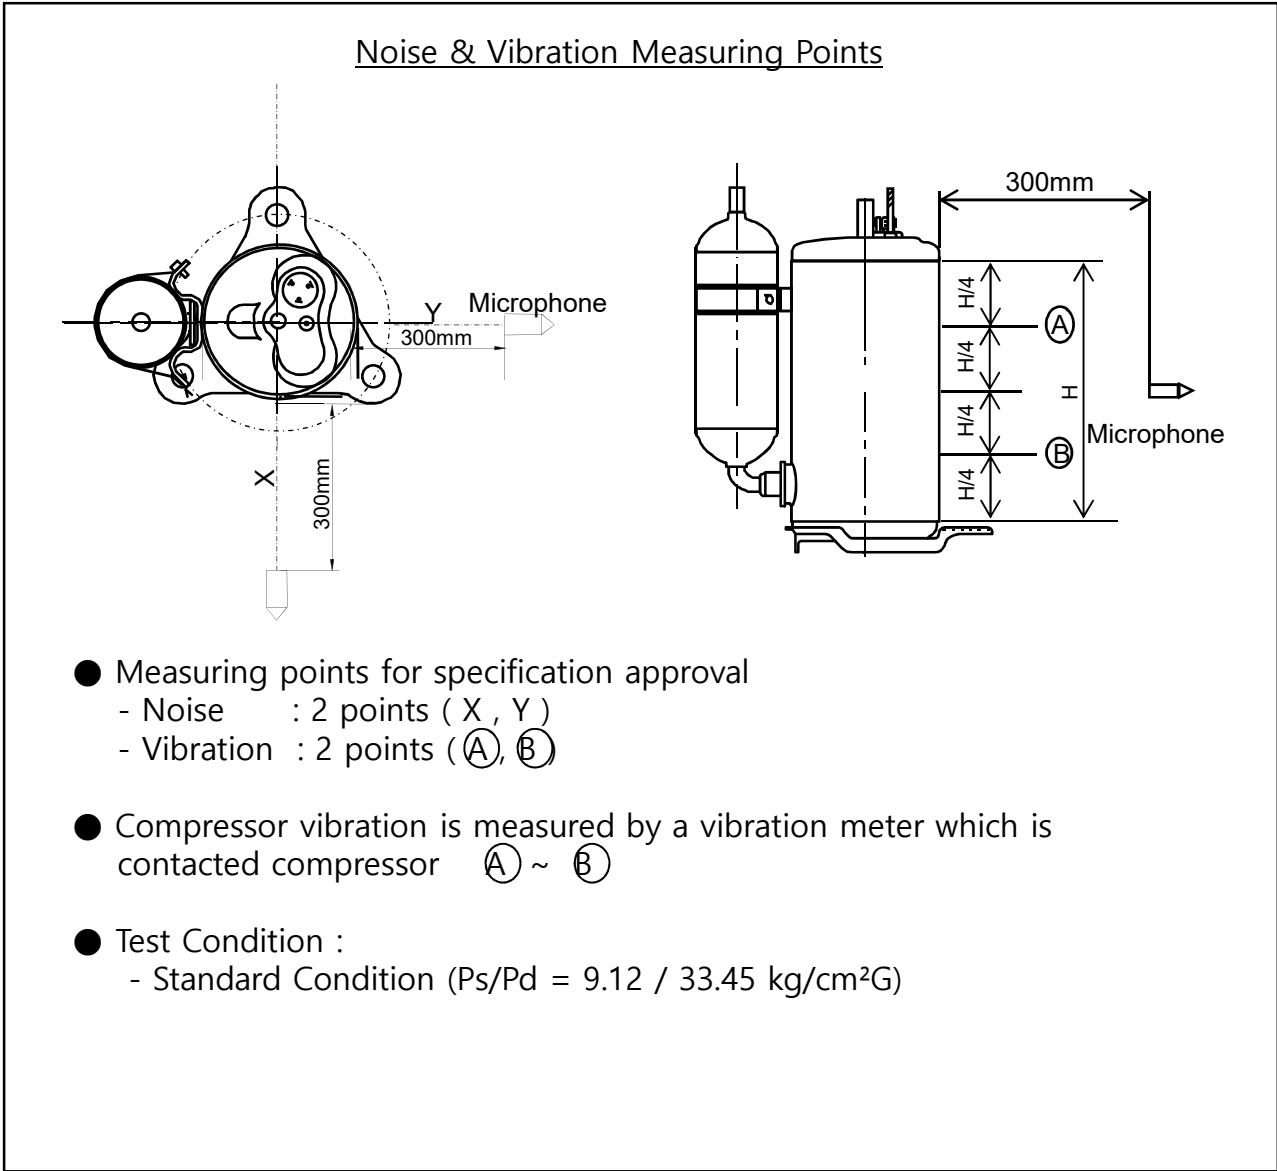

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

## 1.7 Minimum Starting Voltage

Cold Start - Temp. Condition : 35°C - Balanced pressure : Pd – Ps ≤ 0.5 kgf/cm <sup>2</sup>	187 Volts Max.
- Balanced pressure : Pd – Ps = 0 kgf/cm <sup>2</sup>	176 Volts Max.

## 1.8 Voltage Range

at Standard Condition	187 ~ 264 Volts
at Overload Condition	198 ~ 264 Volts

### ☞ Test Conditions

	Standard	Overload
Con. Temp (°C)	54.4	64.4
Eva. Temp (°C)	7.2	15.7
Return Gas. Temp (°C)	35.0	25.0
Ambient Temp (°C)	35.0	54.0


## 1.9 Others

Leak Tight Pressure	High Pressure Side	42 kgf / cm <sup>2</sup> G
	Low Pressure Side	-
Hydrostatic strength Pressure	High Pressure Side	170 kgf / cm <sup>2</sup> G
	Low Pressure Side	69 kgf / cm <sup>2</sup> G
Insulation Resistance ( with 500V D.C Mega Tester )		50 MΩ Min.
Withstand Voltage		At 2,200 V / 1 Sec. Leakage Current is less than 5 mA
Residual Moisture ( Karl Fisher Method )		80 mg Max.
* Residual Impurities		70 mg Max

\*) Each part was measured separately

Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.1
Rev. Date	May.28.2021

## 2.Delivered Parts List

Parts Name	Type ( Model )	EA	Parts Dwg. NO.	Supply	
			LG		
Compressor	GVS265PAB	1	-	(YES)	NO
O.L.P	INTERNAL TYPE	-	-	YES	(NO)
Cover, Terminal	-	1	3550U-L005D	(YES)	NO
Gasket	-	1	4986UHL004A	(YES)	NO
Nut, Common	-	1	FAD30241201	(YES)	NO
Washer, Customized	-	1	FAF30240201	(YES)	NO
Damper, Rubber	-	3	MCQ61847401	(YES)	NO
Sleeve, Damper	- 	3	4816U-L001H	(YES)	NO
Bolt, Stud	-	-	-	YES	(NO)
Washer, Plain	-	-	-	YES	(NO)
Nut, Hexagon	-	-	-	YES	(NO)
Capacitor	-	-	-	YES	(NO)
Screw, Earth	M4*0.7 , Length : Max 0.236 [6 mm].	-	-	Yes	(No)


※ ) Refer to Attachments ( Accessory Parts Drawings. )

Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

# 3.Operating Limit

## 3.1 Operation Range

Discharge Pressure	[ kgf / cm <sup>2</sup> G ]	45 Max
Suction Pressure	[ kgf / cm <sup>2</sup> G ]	3.0 ~ 14.0
Discharge Pipe Temp.	[ °C ]	115 Max.
Motor Coil Temp.	[ °C ]	135 Max.

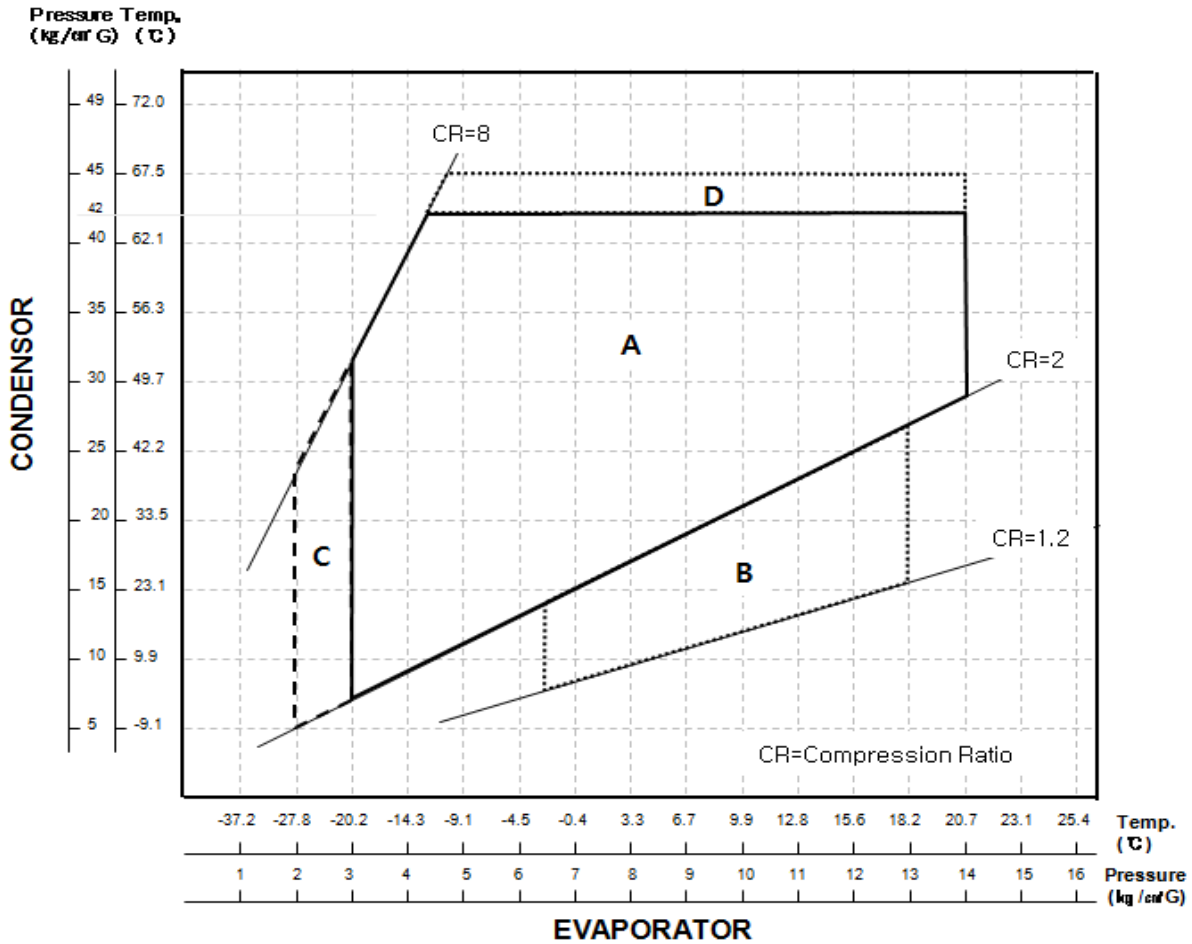

- Area A : Normal Operating Zone
- Area B : High Density Flow Zone  
-During Starting within 3 minutes
- Area C : During defrosting & re-starting  
-Running time within 3 minutes

- Area D : Tropical Model Zone  
-Discharge pressure should be controlled below 45kg/cm<sup>2</sup>G.
- 1.Unit with protective device to monitor high pressure : Allow of running more than 2,000 hr.
- 2.Unit without protective device to monitor high pressure : Total running time should be below 2,000 hr.



※ This guide contains many important safety messages. Always read and obey all safety messages.

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

**▲ WARNING** You can be killed or seriously injured if you don't follow instructions.

### 3.2 Application Limit

Refrigerant Charge Limit	[SRAC : Cooling pump ] 2,030g Max (*K ≈ 0.4, **OIL Dilution Rate ≈ 0.20) [SRAC : Heat Pump] 1,720g Max (*K ≈ 0.5, **OIL Dilution Rate ≈ 0.22)
Liquid Refrigerant Back	System should be designed not to allow the liquid to go back to compressor which cause knocking noise , current increase or undesirable vibration.
Δ T : Temp. Difference°C	Δ T = Case Bottom Temp. - Condensing Temp. It must be kept ΔT ≥ 5°C
Pressure Difference in Operating	The Pressure difference in operating shall be 5.0kgf/cm <sup>2</sup> or more, but 3 minutes starting excluded.
ON/OFF Operation	Each cycle should be at least 6 minutes (ON Time : at least 3 minute , OFF Time : at least 3 minutes)
Pressure Difference at Starting	When starting, discharge pressure is balanced with suction pressure. ( Pd – Ps ≤ 0.5 kgf/cm <sup>2</sup> )
Tilt in Operation	The allowable tilt of the compressor in operation shall be 5° or less.
System Accumulator	The Accumulator volume should be enough to cover 50% of maximum system refrigerant volume.  $* K = \frac{\text{Effective Volume of Accum.} \times \text{Specific gravity of Refrigerant}}{\text{Charged Weight of Refrigerant}}$ <p>※ Effective Volume of Accumulator = 691cm<sup>3</sup>          ※ Specific Gravity of Refrigerant (R410A) = 1.2 g/cm<sup>3</sup> ( at 20°C )</p> <p>If coefficient “K” does not meet recommendation, refrigerant system must check liquid back phenomenon at accumulator.</p>
Protecting Reverse Operation	The compressor must be operated by proper voltage in accordance with the frequency without reverse revolution condition. The reverse revolution condition can be avoided by just keeping right order of phase supplied power source.

## ▲ WARNING

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

### 3.2 Application Limit

Frequency Range	Rated Frequency $\pm 2\%$
Pipe Stress	Don't allow any force on discharge & suction pipe . The piping stress must be less than 300kgf/cm <sup>2</sup> at starting and stopping. And less than 153kgf/cm <sup>2</sup> at running.
Oil Level	It must be checked oil level by the compressor with sight glass we supply. And oil level must be kept over guide line level <b>**note 2.</b> at any condition.
Protection device	Refrigeration system must has the compressor protection device like over pressure, high temperature, sensing locked pump in the controller. When starting & running fail by abnormal overload, controller must be able to cut off power of compressor before motor burn out.
Pump down refrigerant	If pump down time is too long, compressor can be damaged due to excessive temperature increase or poor lubrication. Guideline of pump down process. - Time : less than 30 seconds - Suction Pressure : It should not run under below 1kgf/cm <sup>2</sup> G. And before closing a service valve, compressor running for more than 5 minutes is recommended.

※ If gas charge amount of refrigerant specified is exceeded, both parties should discuss the matter to determine compressor specification. (accumulator volume, lubricating oil amount) and system specifications (crank case heater, oil separator , additional accumulator, etc)

## **▲ WARNING**

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

### **3.3 Process Limit**

Use defined Refrigerant and oil	Any process in where the HCFC's refrigerant or the different kind of oil against the defined. Compressor oil are mixed should be avoided.
Avoid Damage running	The running operation that inspection and the protector inspection that affect a damage to the function and durability of the compressor should be avoided
Running dummy indoor	When the outdoor unit is operated with the indoor dummy unit, the discharged oil should be recovered enough
Prevent oxidation in pipe	Always purge the system and the compressor with the dry nitrogen in order to prevent oxidation of the piping
Charging Refrigerant	When charging refrigerant into the cycle, make sure that refrigerant always be filled from the higher pressure side (condenser exit) of the cycle. If liquid refrigerant is sucked in to the compressor liquid compression occurs, The discharge valve is damaged, lubrication effectiveness degenerates and reliability drops noticeably
Avoid Vacuum running	Do not operate the compressor in a vacuum state. Furthermore do not apply high voltage to a vacuum state compressor. There is a danger that insulation could degenerate, causing electric shock
Avoid Air compression	Do not compress the air including the case of leakage in the refrigeration cycle. If compressors run with air mixed, inside the compressor is heated and pressurized , which may cause an explosion
Promptly Assemble compressor in line	After removing rubber plugs from compressor tubes, Promptly use the compressor. And do not leave in the atmosphere for 10 minutes over. If Air gets into the compressor , accelerating degeneration of the inside of the cycle or compressor
Wiring	Wires connected to the compressor, follow the compressor specification manual and instructions
Storage temperature	-10°C ~ 65°C

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

**\*\* Note 1. OIL Dilution rate**


Oil Weight	
-----	≈ 0.20
Refrigerant Weight + Oil Weight	
※ Specific Gravity of PVE(FVC68D)= 0.94 (at 20°C)	

[ Unit ]

☞ Oil Weight : [ g ]

☞ Refrigerant Weight : [ g ]

**\*\* Note 2. Oil Level Guide Line**

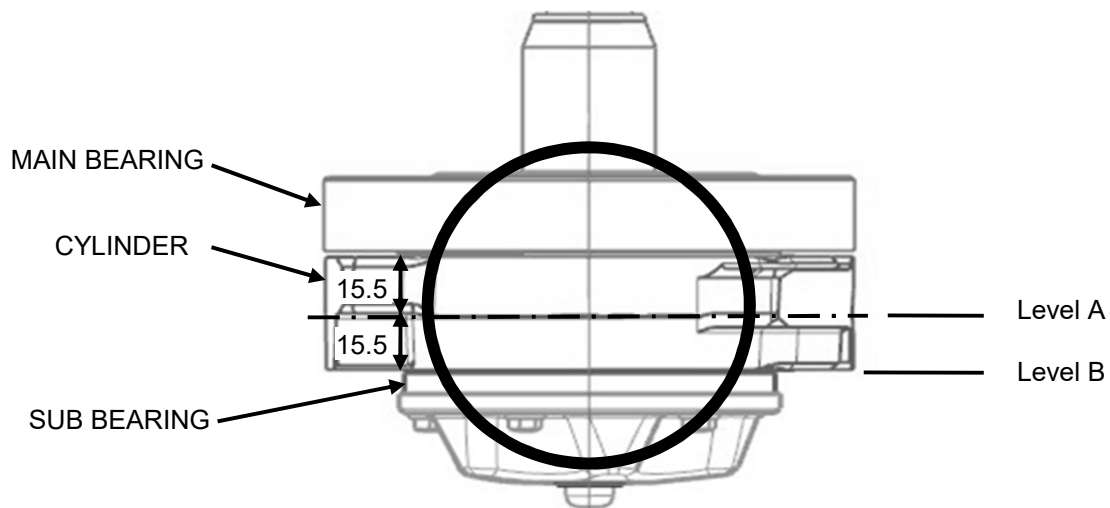


Over Level A : Steady state at any condition.

Over Level B : Minimum level of transition period within 3minutes

Ref. No.	LGETH -170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.1
Rev. Date	May.28.2021

**\* LABEL \***  
[UNIT : mm]

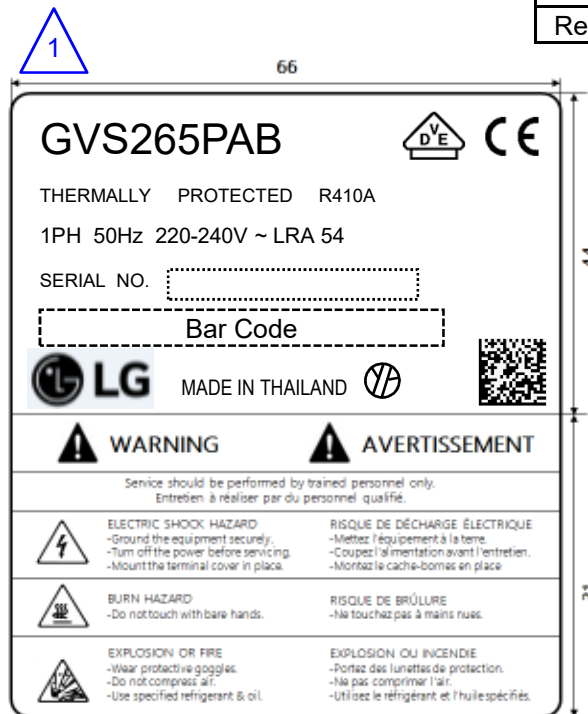

All safety messages will identify the hazard, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed. You are strongly advised to follow these safety instructions.



This is the Safety alert symbol. It indicates a hazardous situation which, if not avoided, could result in death or serious injury.



This is the Electric shock hazard symbol. It indicates a hazardous situation which, if not avoided, could result in the electric shock.



This is the Getting burnt symbol. It indicates a hazardous situation which, if not avoided, could cause fire.



This is the Explosion or Fire symbol. . It indicates a hazardous situation which, if not avoided, could cause explosion or fire.

### **\*1. Effective Period of This Document \***

This document will be effective after LG's receipt with your authorized signature. When design modification is approved by the customer , the current document is unavailable.



### **\*2. Compressor operating range \***

The Compressor can operate within the limits of the outlined area. Outside these operating fields, the system cause early defects in the compressor. The compressor defects caused by applications operating outside the outlined area will not be considered under the warranty. If the appliance be operated out of the operating range, it must be agreed with the supplier.


# Attachment

	PAGE
1. Compressor Drawing	: A- 1
2. Accessory Fitting	: A-2
3. Part Drawings.	: A-3 ~ A-8
4. OLP Characteristic Curve	: A-9
5. Guideline for using R410A	: A-10


Ref. No.	LGETH-170127-007
Date	Jan. 27. 2017
Rev. No.	Rev.0
Rev. Date	-

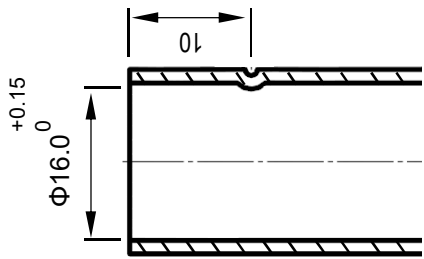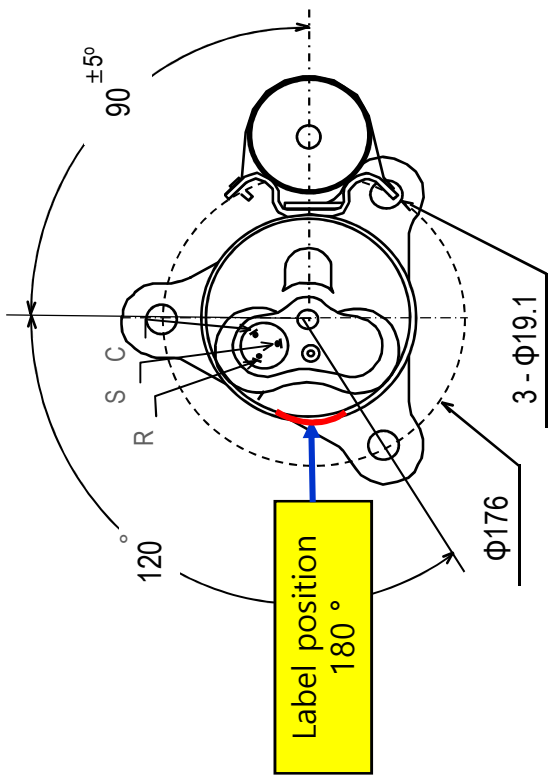

Detail of Suction Tube

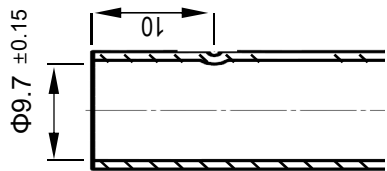

Detail of Discharge Tube

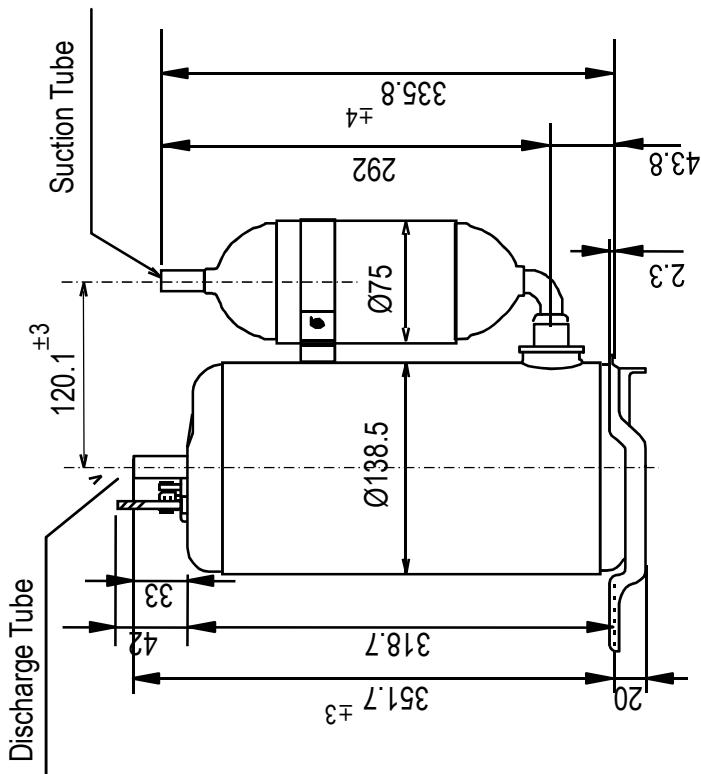


NOTES


1. PAINTING : BLACK PAINT ( ELECTRO DEPOSITION )
2. OIL : PVE(FVC68D) 540 cc CHARGED
3. NITROGEN CHARGED AFTER DEHYDRATION

UNIT	mm	SCALE	N / S	COMP. OUT LINE	
DES. ENGR.	CHF. ENGR.	GVS265PAB			
Jan. 27. 2017	Jan. 27. 2017	Saimornchai T.			
Tanarach U.	Customer	EMBRI TAL			
LG Electronics Inc.	A/C COMP. DIV.	CUSTOMER			


# Accessory Fitting

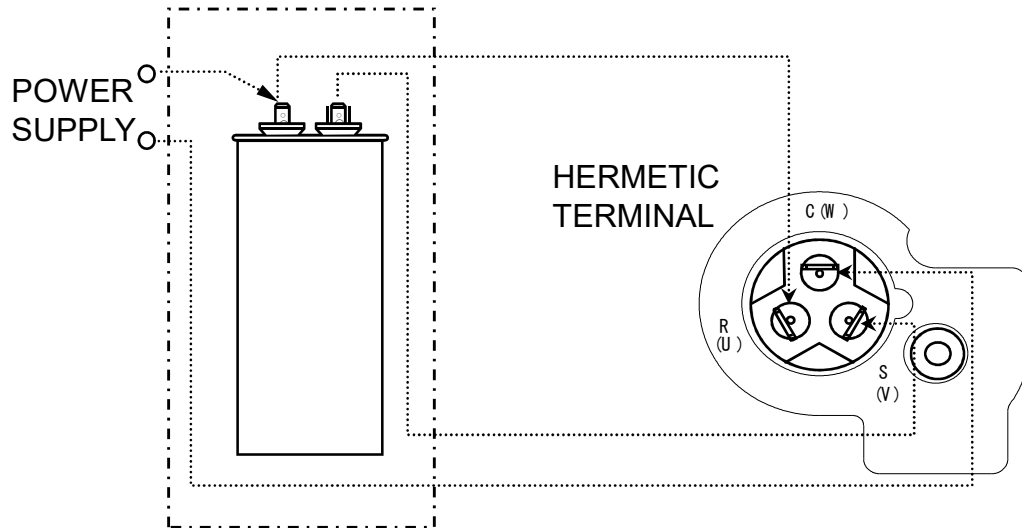

RUNNING CAPACITOR



Cover Terminal

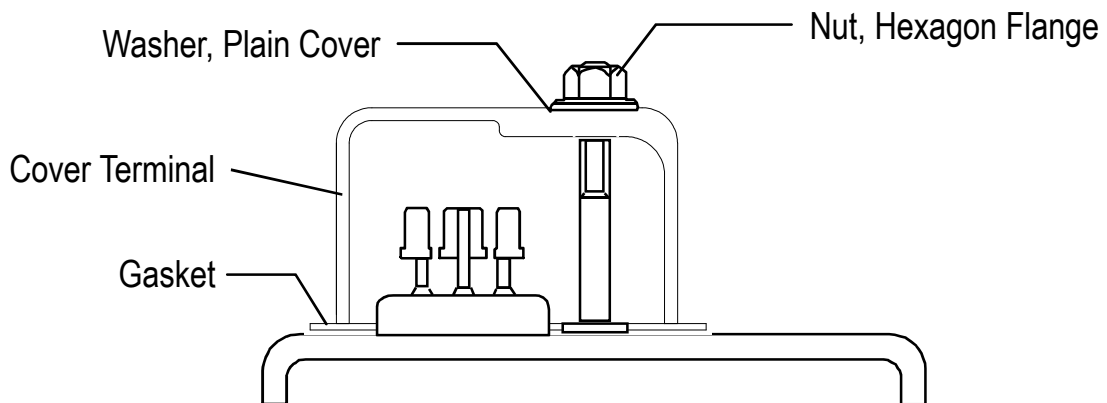


C,S,R mark embossed on cover terminal  
Nut assembly torque should be below 20 kgfcm.



# Cover, Terminal

Drawing No. 3550U-L005D

( UNIT : mm )

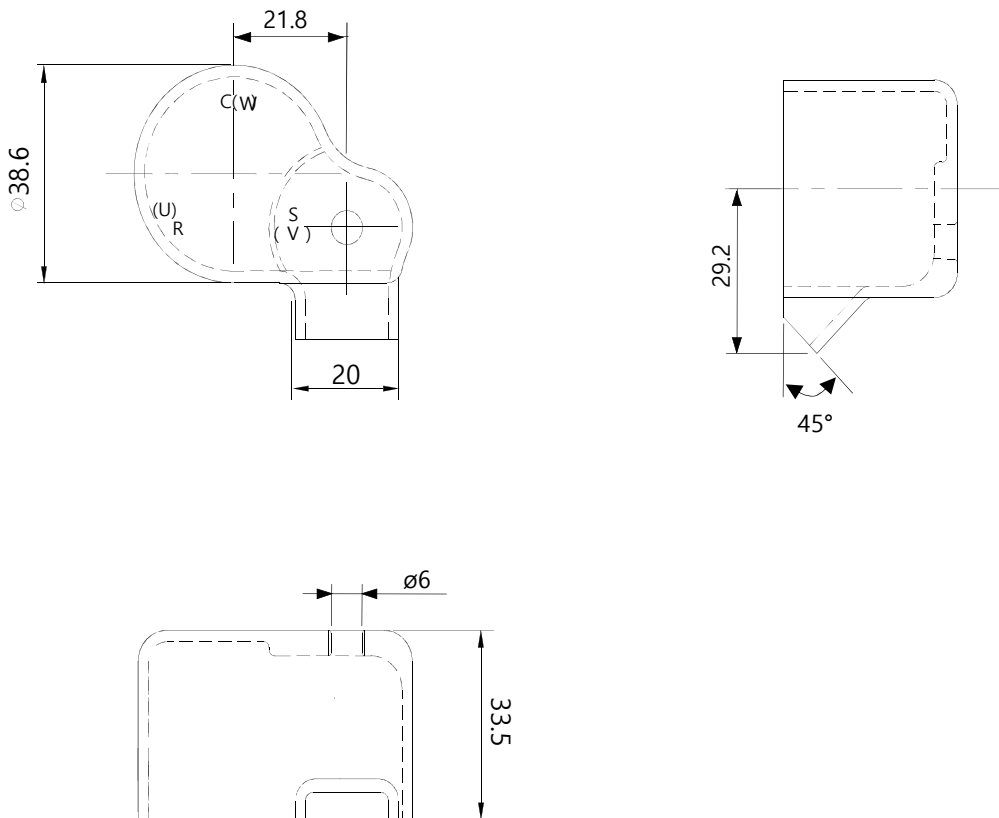


MATERIAL	COLOR	REMARK
Lupox TE-5006F (polybutylene terephthalate)	BLACK	MARKS(C(W),R(U),S(V))

LG Electronics

# Gasket

Drawing No. 4986UHL004A

( UNIT : mm )

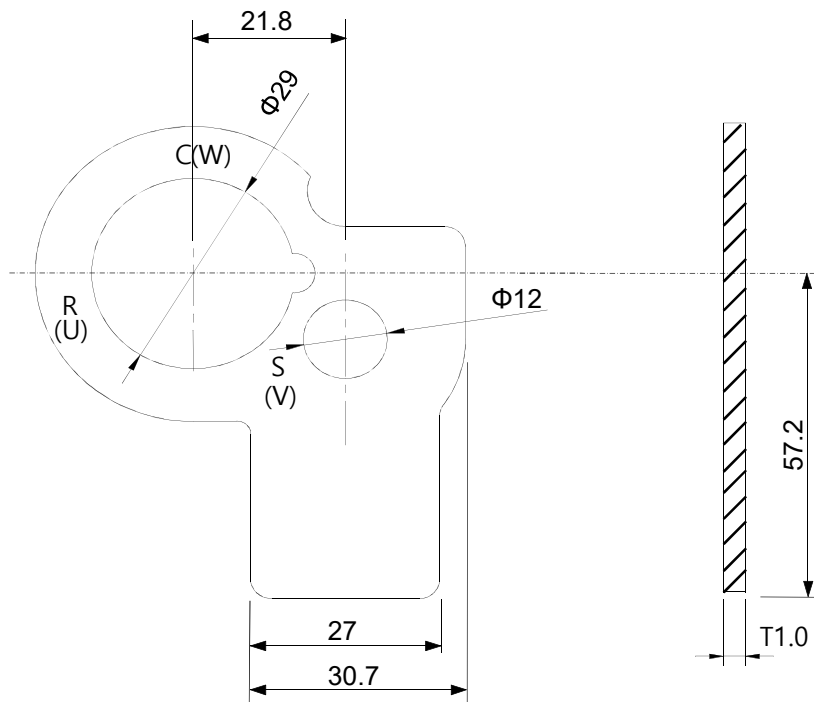


MATERIAL	REMARK
SILICONE	MARKS(C(W),R(U),S(V))

LG Electronics

# Nut, Common

Drawing No. FAD30241201

( UNIT : mm )

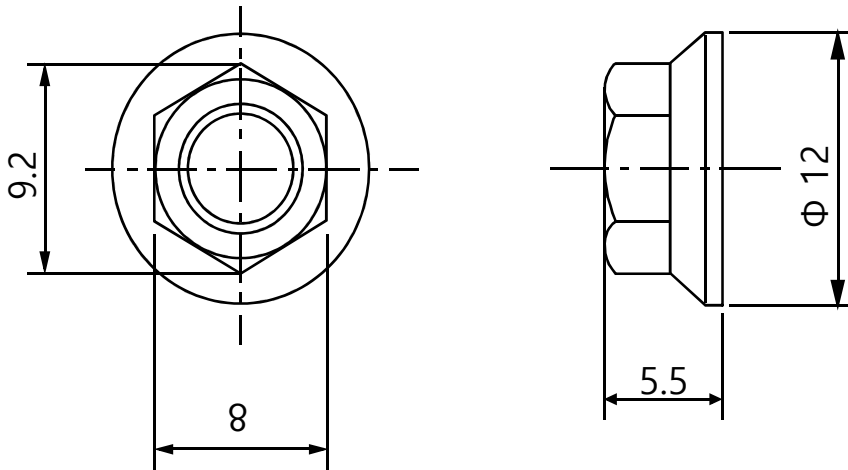


\* MATERIAL : STEEL ( ELECTRIC PLATING OF ZINC )

LG Electronics Inc.

# Washer, Customized

Drawing No. FAF30240201

( UNIT : mm )

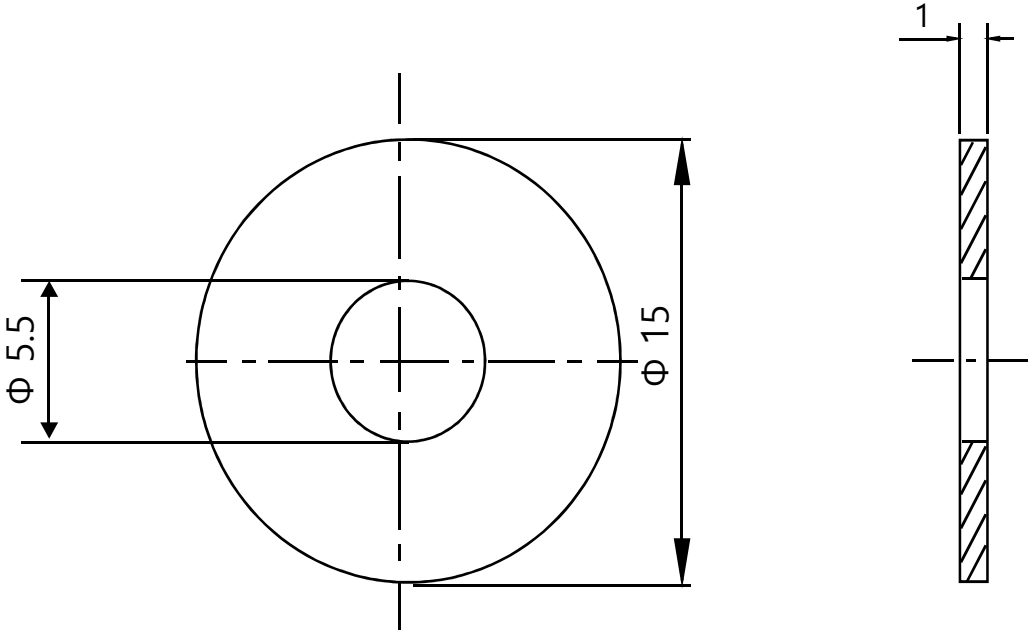


\* MATERIAL : POLYAMIDE ( NYLON )

LG Electronics Inc.


# Damper, Rubber

Drawing NO. MCQ61847401

( UNIT : mm )

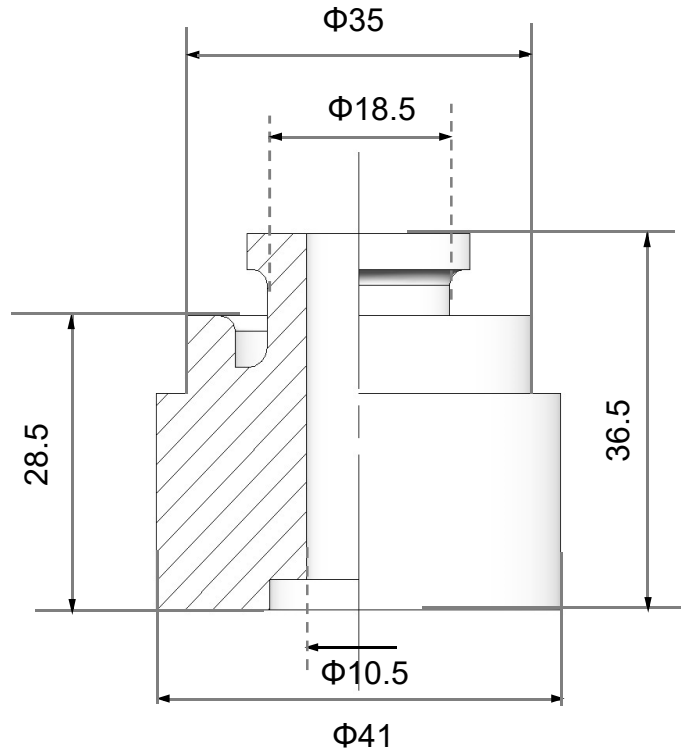

\* MATERIAL : NATURAL RUBBER


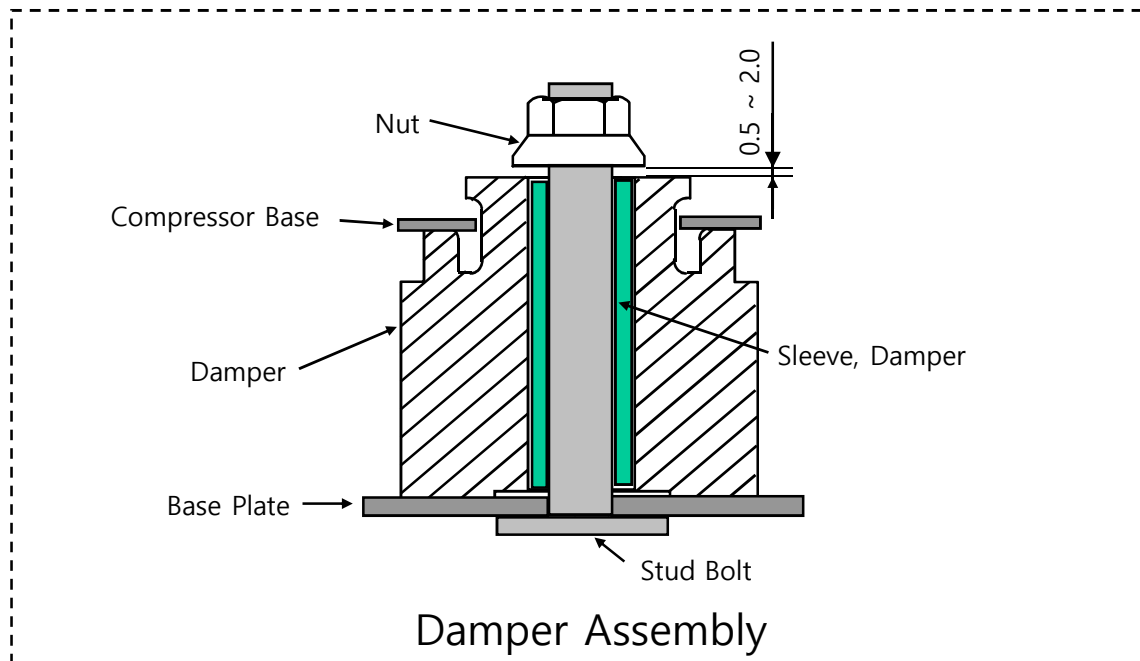


LG Electronics Inc.

# Sleeve , Damper

Drawing NO. 4816U-L001H



( UNIT : mm )

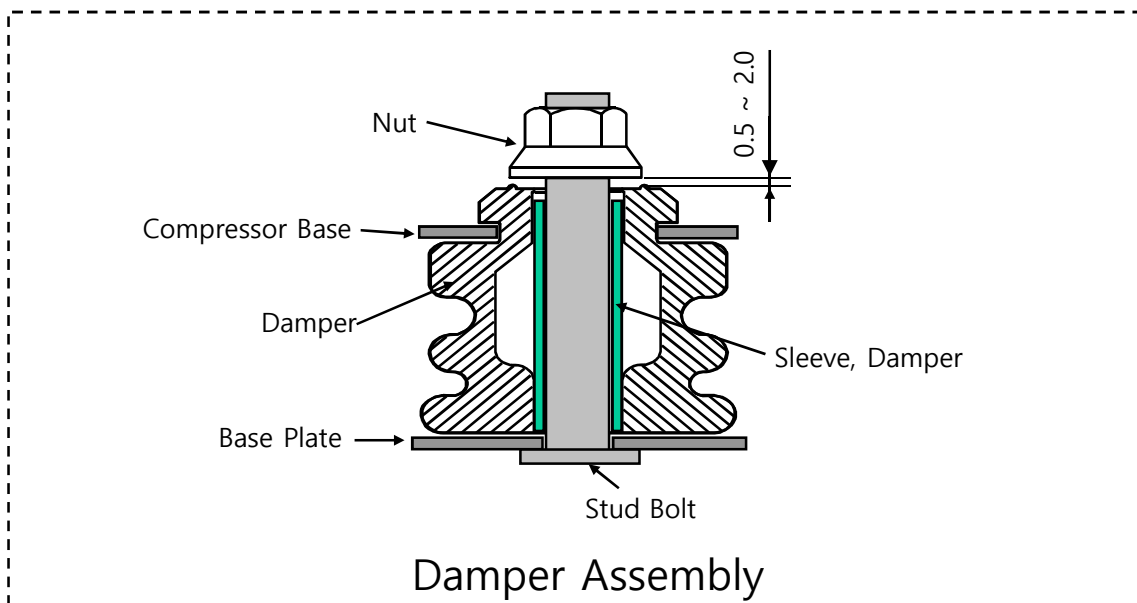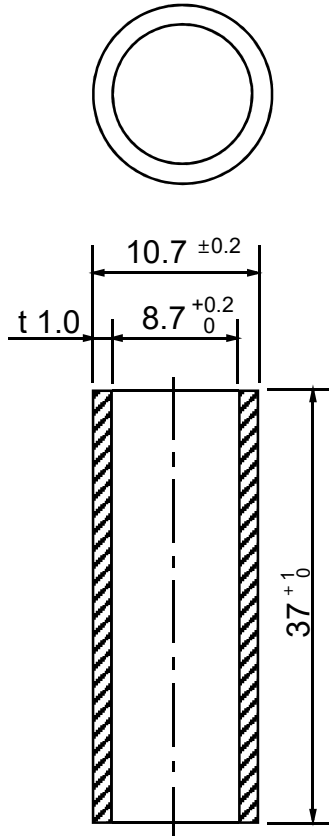

LG Electronics Inc.

# OLP Characteristic Curve

機密文書につき第三者への  
配布・複写等を禁ず。

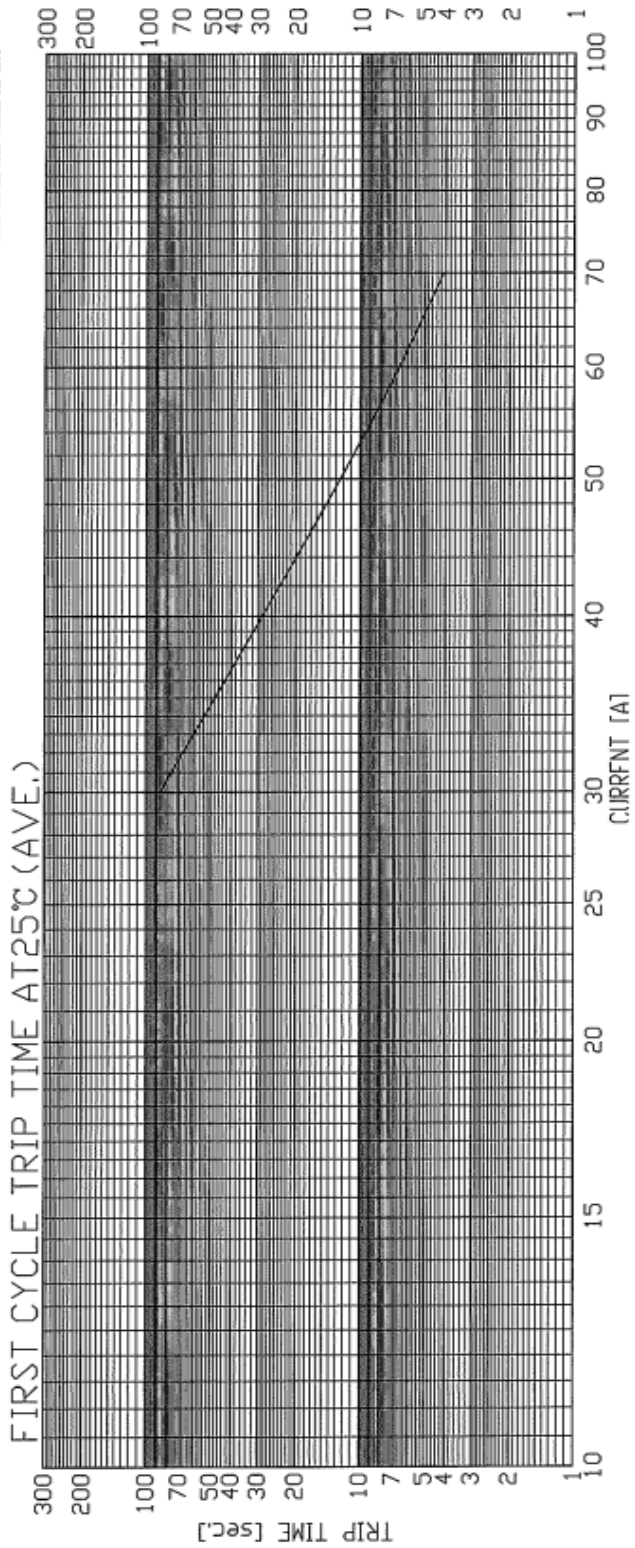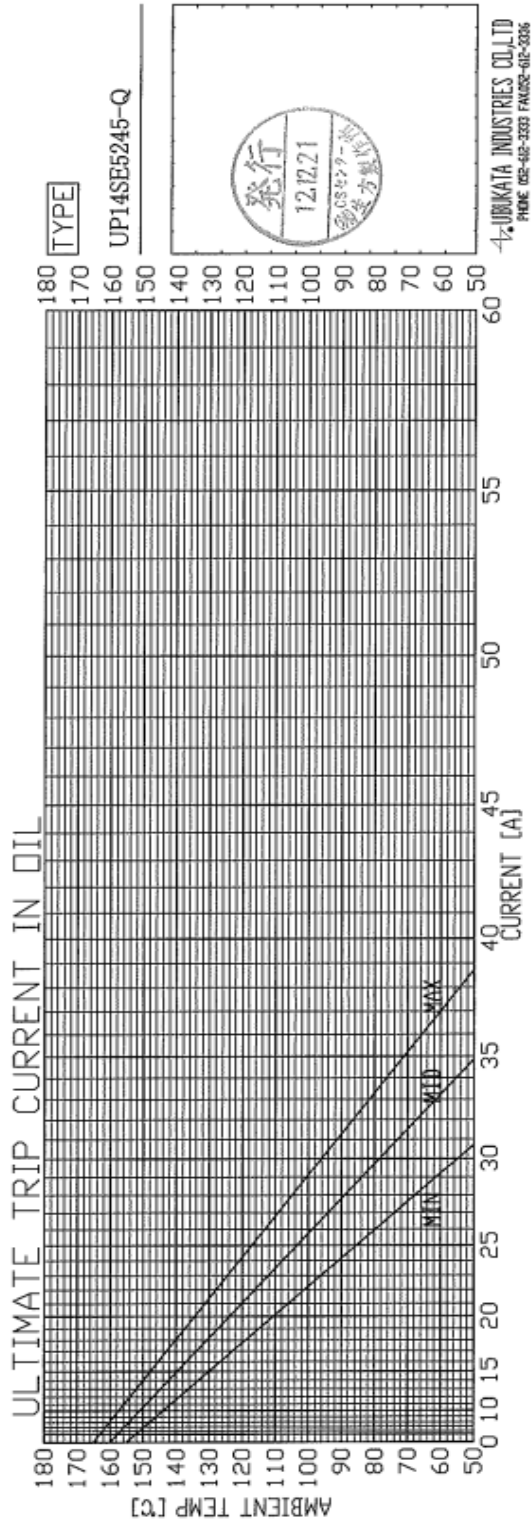

OLP. Model	Open Temp.	Close Temp.	UTC (at 120°C)	ST (5~15 sec.)	Max. Current Capacity
UP14SE5245	160 ± 5°C	90 ± 10°C	17.8~24.2A (21.0A)	60A	80A

# Guideline of using R410A

## ■ Process Control

### 1. Residual Moisture

Moisture control of lubricant is very important, because hydrolysis of lubricant causes many problems.

### 2. Residual Chlorine

Chloric fluoro carbon and solvent cause decomposition of oil, no chlorine is recommended ( if impossible, below 100 ppm )

### 3. Contamination Control

Contamination accelerate wear of compressor parts and decomposition of oil. Therefore contamination control must be required.

### 4. Compressor Sealing

It is recommended to assemble compressor within **5 minutes** after removing sealing cap of compressor.

### 5. Tube Connection

When brazing welding for tube connection, no use of Flux is recommendable.

## ■ Facilities

### 1. Vacuum Pump

Below 0.5 torr vacuum rate is recommendable.

### 2. Charging System

An exclusive charging equipment is necessary.