
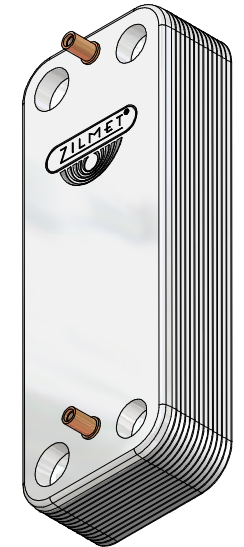



CODE	n° Plates	H
17B2071032	10	30
17B2071232	12	34
17B2071432	14	39
17B2071632	16	45
17B2071832	18	49
17B2072032	20	52
17B2072232	22	57
17B2072432	24	61
17B2072632	26	65
17B2072832	28	69
17B2073032	30	73

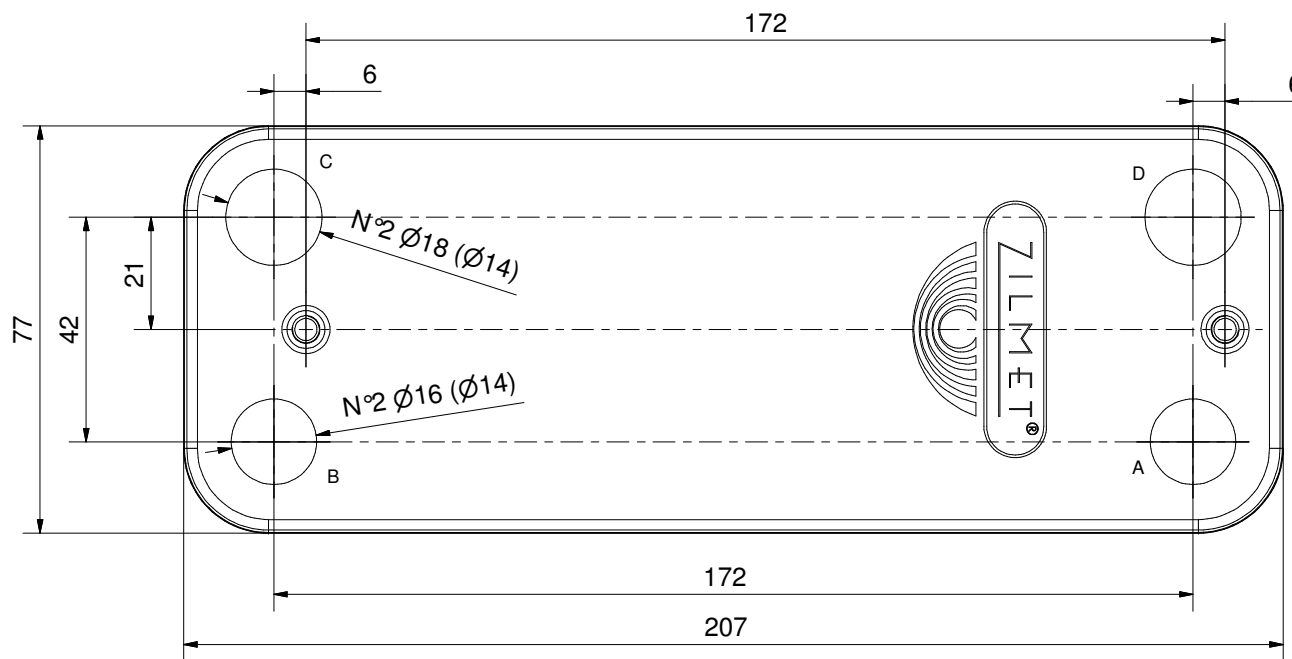

Pressione max esercizio (Max operating pressure):
 Circuito Primario (Primary circuit): 3 bar
 Circuito secondario (Secondary circuit): 8 bar
 Temperatura esercizio (Max operating temperature): -10/+99°C
 Materiale (Material): INOX AISI 316L
 Materiale di brasatura (Brazing material): 99.9% Cu
 Materiale raccordi (Connection material): INOX AISI 316

CIRCOLAZIONE FLUIDI CIRCUITO PRIMARIO ENTRATA IN C - USCITA IN D (PRIMARY CIRCUIT IN C - OUT D)
 CIRCUITO SECONDARIO ENTRTA IN A - USCITA IN B (SECONDARY CIRCUIT SANITARY IN A - OUT B)

 35010 Limena (PD) Via del Santo 242 tel.049/8840662	DIS. N° / DRAWING N°			CODICE / CODE 17B207--32
	ZB 207			
Denominazione / Denomination HEATING HEXCHANGER	Drawn	Date	Signature	Disegno di proprietà della Zilmet S.p.A. Tutti i diritti riservati. / This drawing is property of company ZILMET S.p.a. All rights reserved.
	Checked	Date	Signature	
	Approved	Date	Signature	