


UNITA' CONDENSATRICI AD ARIA a VALVOLA CUBIGEL

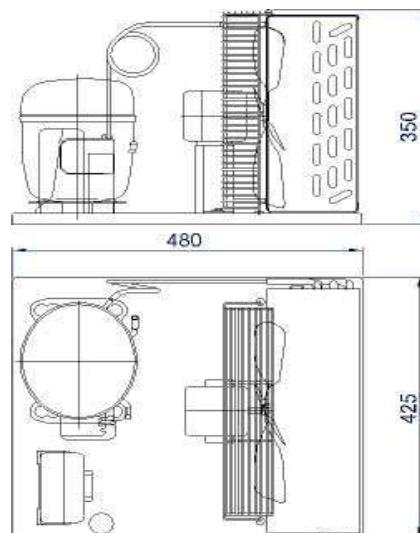

R 404A – media-alta temperatura

Modello	HP	W/h (temp. ambiente 35°C)			Dimensioni
		Temp. Evaporazione			
		- 25°C	- 10°C	0°C	Larg x lung x alt
CML 45 TB	1/5	215	393	539	325 x 425 x 235
CML 60 TB	1/4	266	490	672	330 x 425 x 245
CML 80 TB	1/3	408	672	932	355 x 450 x 270
CML 90 TB	3/8	421	774	1.061	355 x 425 x 270
CMP 12 TB	1/2	581	1.081	1.491	425 x 480 x 350
CMP 14 TB	1/2P	613	1.173	1.614	425 x 500 x 350
CMX 18 TB	7/8	790	1.424	1.877	430 x 500 x 350
CMX 21 TB	1	847	1.517	2.107	455 x 525 x 440
CMS 26 TB	1.3/8	1.183	2.222	3.021	455 x 515 x 440
CMS 34 TB	1.5/8	1.335	2.960	3.984	455 x 515 x 440

VERSIONI CON CONDENSATORE ARIA a DOPPIA VENTOLA

R 404 media alta temperatura

	HP	- 25°C	- 10 °C	0°C	Larg x lung x alt
CMX 21 TB	1	880	1.765	2.512	480 x 650 x 330
CMS 26 TB	1.3/8	1.166	2.198	2.982	480 x 650 x 330
CMS 34 TB	1.5/8		2.733	3.704	480 x 650 x 330

VERSIONI TRIFASE - R404A MEDIA ALTA TEMPERATURA

	HP	- 25°C	- 10 °C	0°C	Larg x lung x alt
CMS 26 T3	1.3/8	1.206	2.309	3.159	455 x 515 x 440

VERSIONI TRIFASE - R404A BASSA TEMPERATURA

	HP	- 30°C	- 20°C	- 10°C	Larg x lung x alt
CMS 34 F3	1	1.139	1.746	2.448	425 x 545 x 350