

DATA SHEET CONDENSING UNIT UCG 50 A

| | | | |
|----------------------------------|-------------------|----------|-----|
| MTH CODE - DESCRIPTION | 02011.7 | UCG 50 A | |
| REFRIGERANT | R452A | | |
| APPLICATION | LBP | | |
| POWER SUPPLY | 220-240 / 1~ / 50 | | |
| EXPANSION | VALVE EXPANSION | | |
| HP - LIQUID RECEIVER (Lt) | 1/2 | 0,88 | |
| FAN (no°) - DIAMETER (mm) - Watt | 1 | 220 | 10 |
| DIMENSIONS (PxLxH) | 500 | 340 | 270 |
| CONNECTION (IN / OUT) | 3/8"-10 | 1/4"-6 | |

H=270

P=500
L=340


Foto indicativa

COMPRESSOR

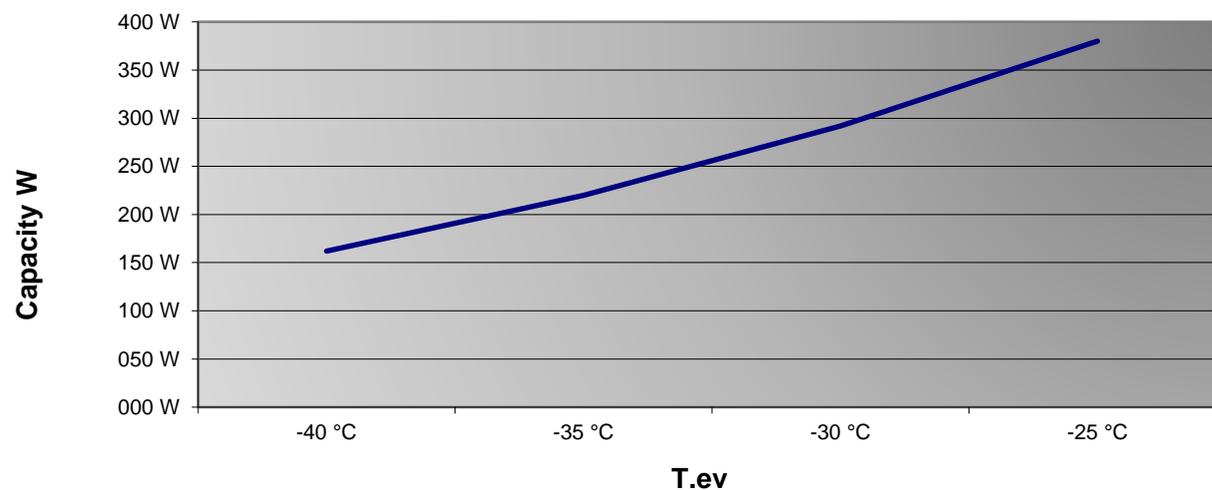
| | | | | | |
|-------------------------|-------------------|-------------|------|-----|------|
| COMPRESSOR TYPE | HERMETIC | | | | |
| POWER SUPPLY | 220-240 / 1~ / 50 | | | | |
| COMPRESSOR MANUFACTURER | EMBRACO | | | | |
| MTH CODE - DESCRIPTION | 00694 | NEK 2134 GK | | | |
| CC ₃ | W IN | A IN | 8,78 | 291 | 1,32 |
| DATASHEET VENDOR | | | | | |


embraco
 POWER IN. CHANGE ON.

Foto indicativa

CONDENSING UNIT PERFORMANCES

| Code | Model | Compr. | Potenza sonora dB(A) | HP | -40 °C | -35 °C | -30 °C | -25 °C |
|---------|----------|-------------|----------------------|-----|--------|--------|--------|--------|
| 02011.7 | UCG 50 A | NEK 2134 GK | 0 | 1/2 | 162 W | 220 W | 292 W | 380 W |


Test conditions T_{ev} = -30°C

Condensing temperature +45°C, Ambient temperature +32°, Superheat 2K, Subcooling 8K (1 fan)

(*)

MTH S.r.l. has the right to make, anytime and without prior notice, updating and technical changes without the duty of informing third party.