


Looking ahead,
going beyond expectations
Ahead > Beyond



HYDROSTATION

Data Book 50/60Hz

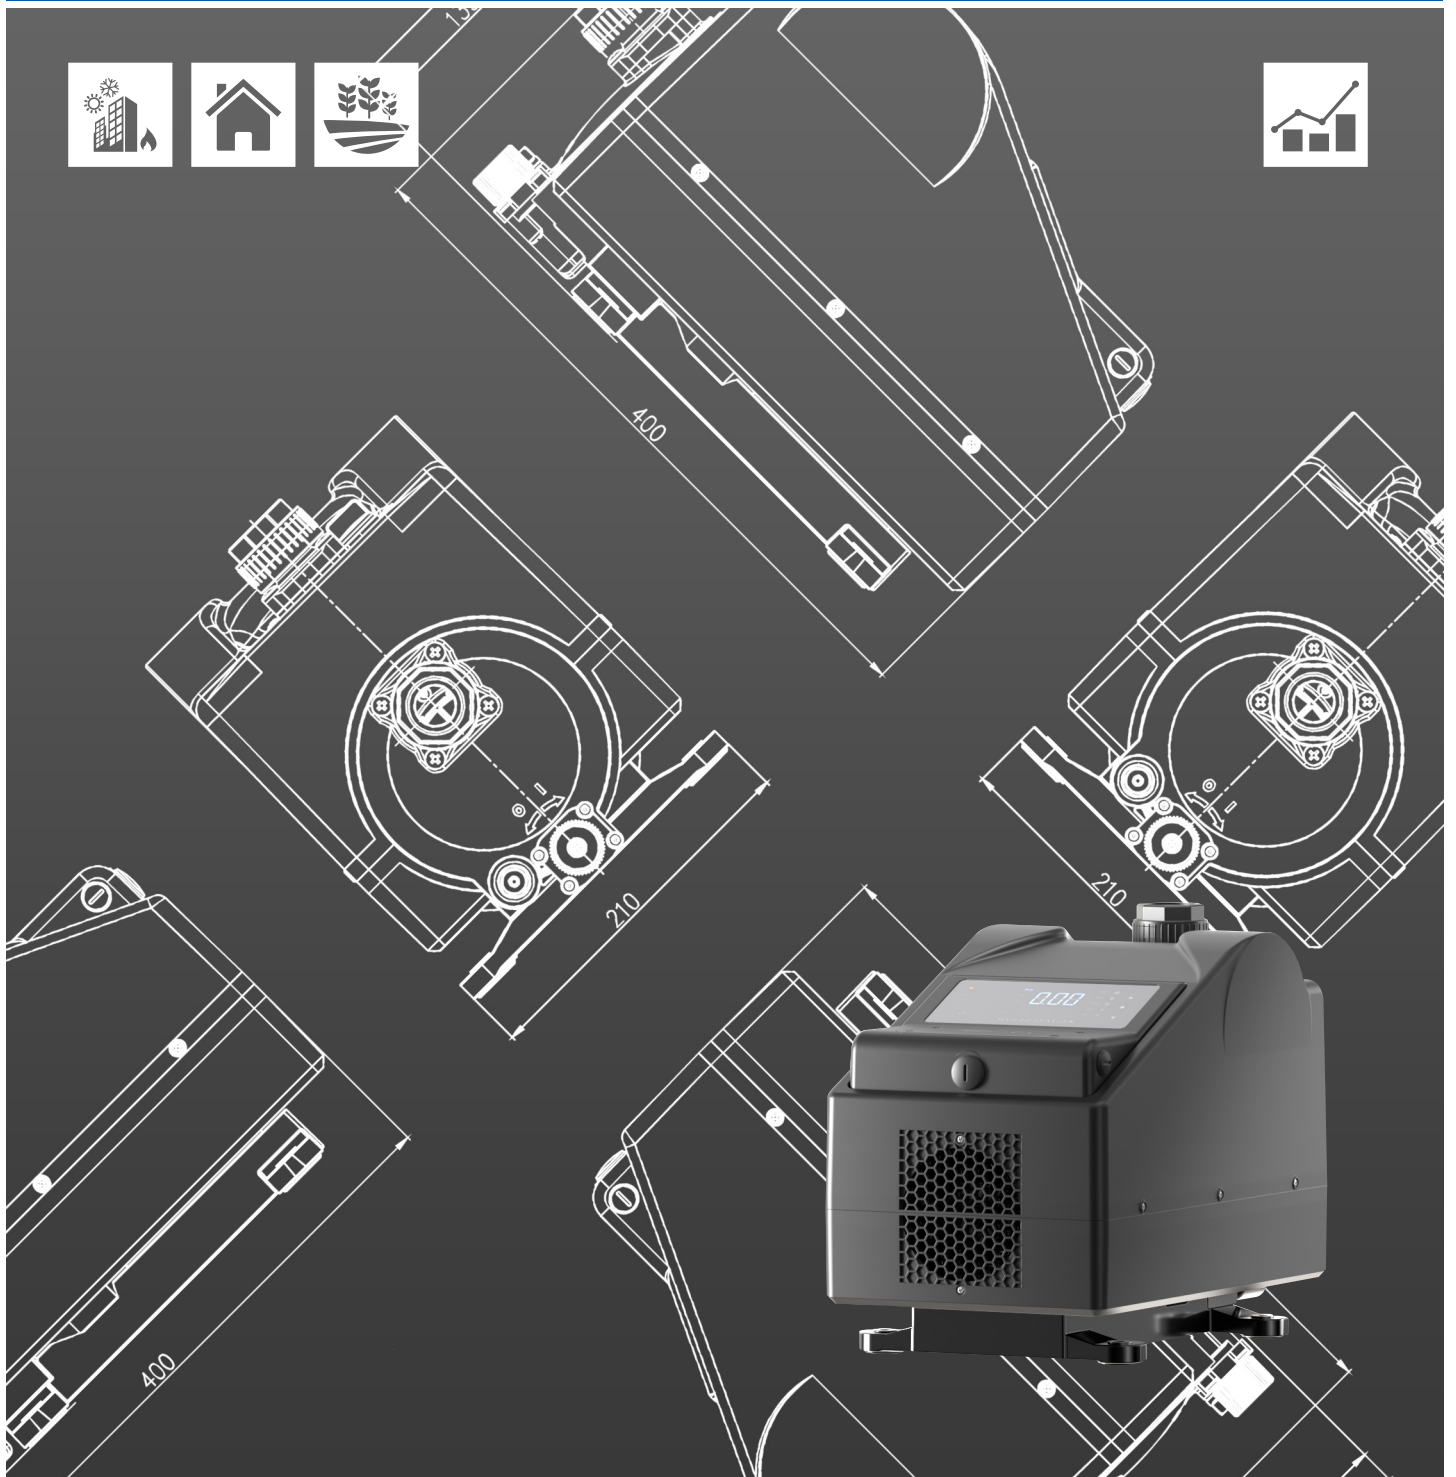

INDEX

DEFINITION AND USE OF PRESSURISATION UNITS	3
TYPICAL APPLICATIONS	3
OPERATING CONDITIONS	3
TESTS AND TRIALS.....	3
MECHANICAL AND HYDRAULIC TESTS	3
ELECTRICAL TESTS.....	4
Principle of Operation of the booster set Hydrostation.....	4
PRODUCT SPECIFICATIONS	5
CURVE SPECIFICATIONS	6
PERFORMANCE RANGE	7
PERFORMANCE CHART	7
DIMENSIONS AND WEIGHT	8
HYDROSTATION.....	8
HYDROSTATION TWIN.....	9
HYDROSTATION TWIN MANIFOLD KIT.....	10

DEFINITION AND USE OF PRESSURISATION UNITS

In situations in which a municipal water mains is lacking or insufficient for the proper operation of the services, one must install a pressurization unit to provide acceptable pressure and flow rates to even in the most unfavourable services. Pressurisation units are used wherever there is a need to increase the pressure, or to pressurise a water circuit. **EBARA HYDROSTATION pressurisation unit** is an automatic system with a pump designed to provide a simple and reliable solution to the most common requirements for maintenance of water supply pressure for apartment buildings, centres, offices and schools as well as providing auxiliary service in agricultural applications. They stand out for their robust construction, compact size, excellent efficiency and silent operation. Hydrostation is equipped with INVERTER and controlled by pressure transmitter and an integrated airless buffer tank.

TYPICAL APPLICATIONS

BUILDING SERVICE	RESIDENTIAL	AGRICULTURE
		

OPERATING CONDITIONS

EBARA HYDROSTATION pressurisation units can be used, in their standard versions, for civil, industrial and agricultural applications, as follows:

- building service
- water lifting and handling
- irrigation

The conveyed fluid must be: clean, potable, ground or mixed water, free of solid or fibrous suspensions and aggressive chemical substances.

The units must be installed under cover, protected from the weather and freezing.

- Conveyed water temperature 5÷45°C
- Ambient operating temperature 5÷50°C, no higher than 1000 m above sea level.
- Max relative humidity 60% at 45°C.

TESTS AND TRIALS

Before shipping, all EBARA pressurisation units are subject to hydraulic, mechanical and electrical testing.

MECHANICAL AND HYDRAULIC TESTS

- Pump direction of rotation
- Mechanical testing of moving parts and running noise

ELECTRICAL TESTS ON THE PUMP

- Earthing system continuity
- Applied voltage (dielectric rigidity)
- Insulation resistance

PRINCIPLE OF OPERATION OF HYDROSTATION

The unit is designed to operate as an integrated system that includes pump, permanent magnet synchronous motor and variable speed drive. Depending on water demand the unit operates in variable frequency mode to maintain constant pressure water supply.

PRODUCT SPECIFICATIONS

HYDROSTATION			
Operating range	Liquid Handled [type]	Clean water	
	Temperature [C°]	Liquid	min +5 max +45
		Ambient	min +5 max +50
	Maximum working pressure [Mpa]	0,6	
	Nominal flow rate [m³/h]	5,6	
	Maximum working pressure [bar]	6	
	Maximum suction depth [m]	6	
Pipe connection	Suction	GF 1"	
	Discharge	GF 1"	
Material	Casing cover	Nylon PA6 GF 30%	
	Impeller	PPO + GF 20%	
	Diffuser	PPO + GF 20%	
	Pump Shaft	Stainless Steel AISI 304	
	Mechanical Seal	Graphite/silicon carbide/EPDM	
	O-rings	EPDM/NBR	
Motor data	Voltage [Vac]	220/240	
	Acceptable voltage fluctuation	± 15%	
	Maximum current [A]	4,6	
	Power rating	[kW]	0,8
		[HP]	1,1
	Expected Cosφ	0,8	
	Motor Efficiency	95%	
	Protection degree	IP65	
	Efficiency Class	IE5	
Noise Level [dBA]	<43		
Applicable standard of test		ISO 9906:2012 - Grade 3B	

CURVE SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9906:2012 – Grade 3B.

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt).

The NPSH curve is an average curve obtained in the same conditions of performance curves.

During the pump selection, consider to get a safety margin of at least 0.5 m.

The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:

Q = volume flow rate

H = total head


P2 = pump power input (shaft power)

η = pump efficiency

NPSH = net positive suction head required by the pump

Pressure drops of the unit's fittings are not considered

PERFORMANCE RANGE

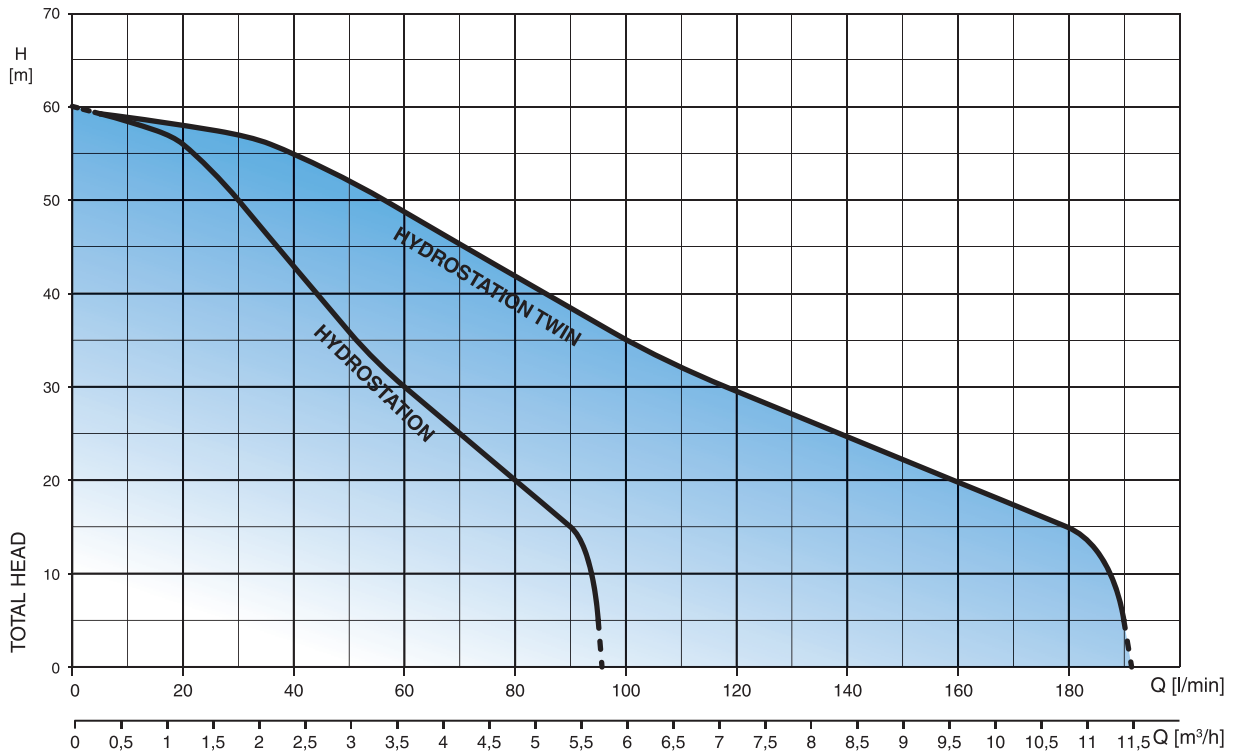

SELECTION CHART

Model	Motor		Q= Capacity											
	kW	HP	l/min	0	10	20	30	40	50	60	70	80	90	95
			m³/h	0	0,6	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	5,7
			H= Total manometric head in meters											
HYDROSTATION	0,8	1,1		60	58,5	56	50	43	36	30	25	20	15	5

Model	Motor		Q= Capacity											
	kW	HP	l/min	0	20	40	60	80	100	120	140	160	180	190
			m³/h	0	1,2	2,4	3,6	4,8	6	7,2	8,4	9,6	10,8	11,4
			H= Total manometric head in meters											
HYDROSTATION TWIN	0,8	1,1		60	58,5	56	50	43	36	30	25	20	15	5


50_{Hz}
60_{Hz}

HYDROSTATION


DIMENSIONS AND WEIGHT

DIMENSIONS AND WEIGHT

HYDROSTATION PRODUCT DIMENSIONS

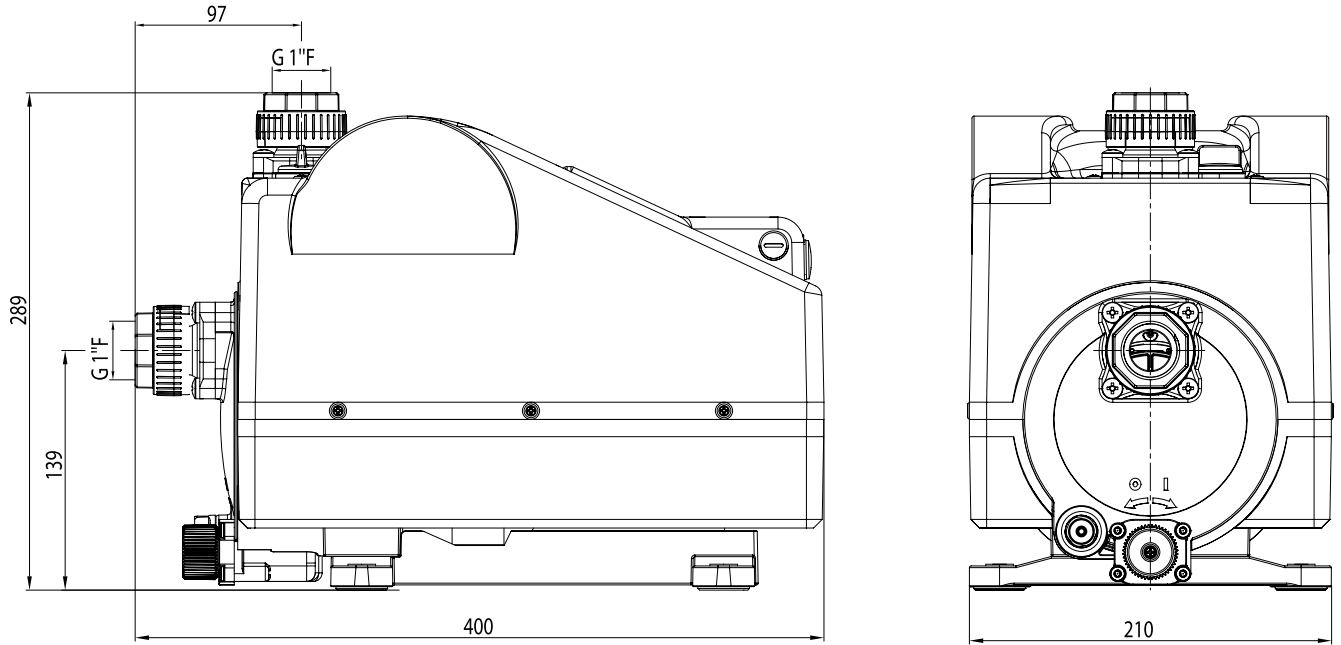

PACKAGING DIMENSIONS

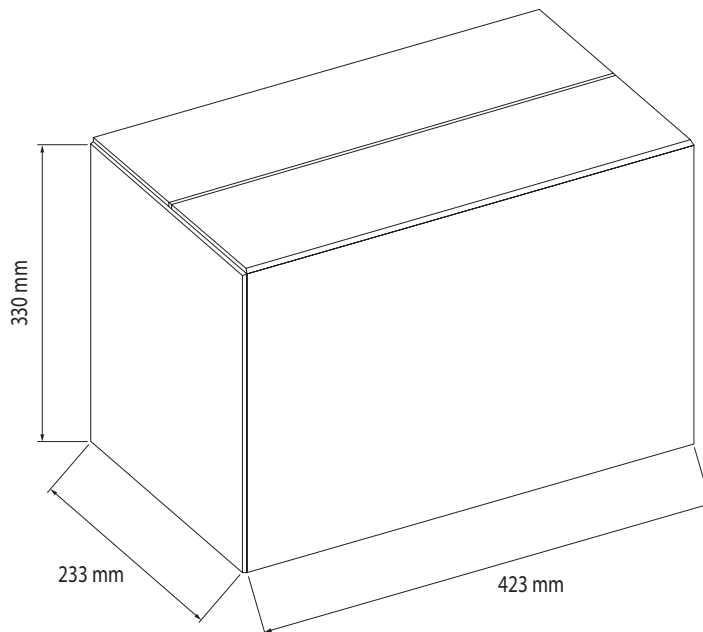

Weight: 13,5 Kg

The dimensions may change without notice.




50_{Hz}
60_{Hz}

HYDROSTATION

DIMENSIONS AND WEIGHT

DIMENSIONS AND WEIGHT

HYDROSTATION TWIN PRODUCT DIMENSIONS

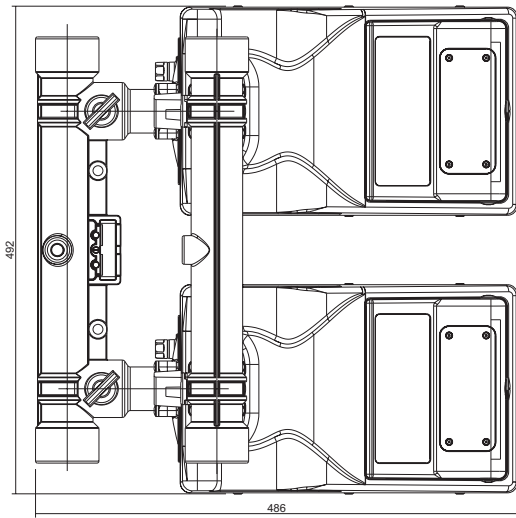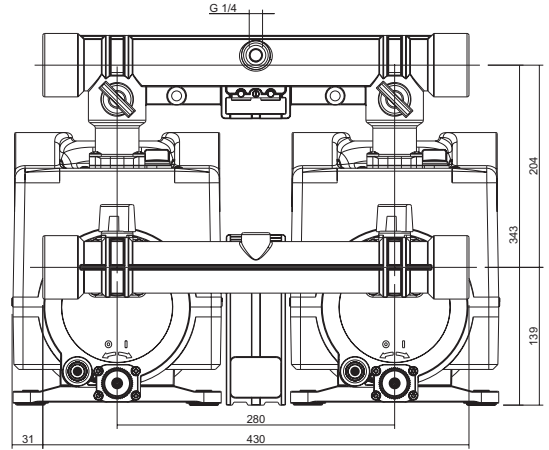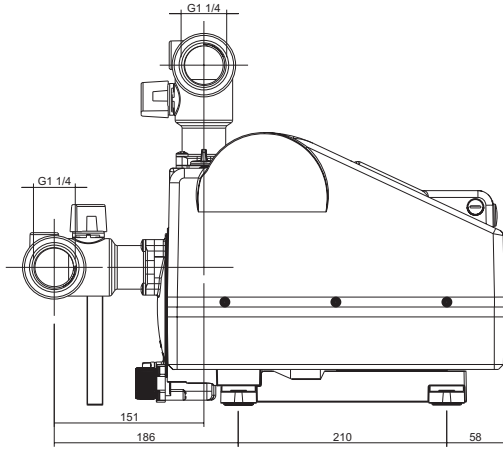

The dimensions may change without notice.


50_{Hz}
60_{Hz}

HYDROSTATION


SECTION

HYDROSTATION

HYDROSTATION MANIFOLD KIT PRODUCT DIMENSIONS

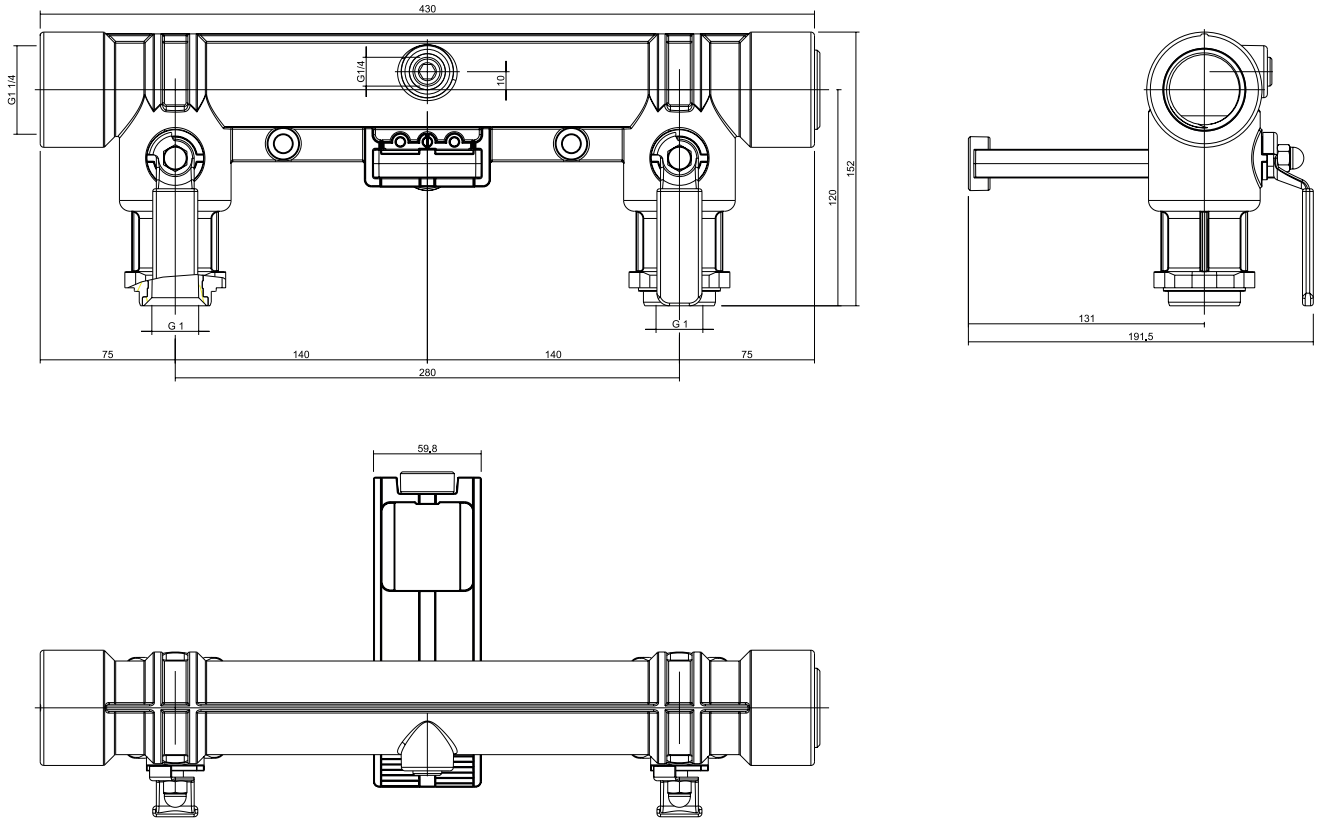

PACKAGING DIMENSIONS

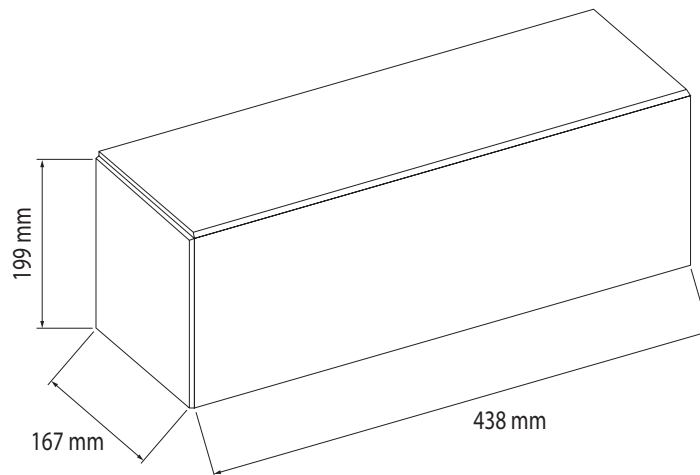

The dimensions may change without notice.

10

EBARA Pumps Europe

EBARA Pumps Europe reserves the right to make modifications without prior notice

