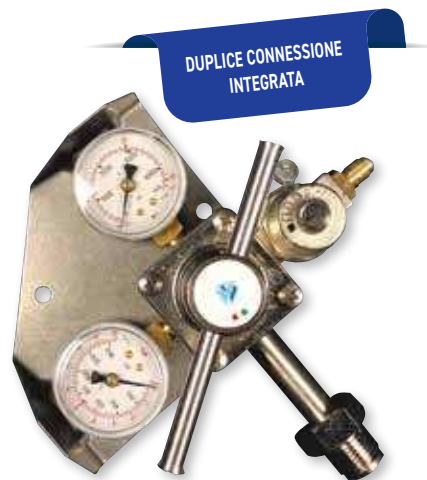


## AZ200

### Riduttore professionale per bombole e cartucce

Riduttore professionale per eccellenza con **duplice connessione** integrata per cartucce e bombole (non richiede alcun adattatore esterno) e valvola di sicurezza "High Performance".

Codice	Modello	Paese	Attacchi bombole	Norma di riferimento	Attacchi cartucce
10002017	AZ200-50	IT	W 21.7 x 1/14" M	UN 11144-5	M10x1
10002019	AZ200-50/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C	M10x1
10002018	AZ200-50/E	GB	G 5/8" M	BS 341 nr.3	-
10002020	AZ200-50/C	D	W 24.32 x 1/14" F	DIN 477 nr.10	M10x1



### Caratteristiche tecniche

Pressione ingresso	20 MPa	Dimensioni	380 x 200 x 130 mm
Pressione max. uscita	4,8 MPa	Peso	1,8 kg
Attacchi	1/4" SAE		

## WN2-60

### Riduttore azoto

Riduttore con connessione per bombole di Azoto o AZOIDRO ricaricabili.

Codice	Modello	Paese	Attacchi bombole	Norma di riferimento
10002035	WN2-60	IT	W 21.7 x 1/14" M	UN 11144-5
10002037	WN2-60/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C
10002036	WN2-60/E	GB	G 5/8" M	BS 341 nr.3
10002038	WN2-60/C	D	W 24.32 x 1/14" F	DIN 477 nr.10



### Caratteristiche tecniche

Pressione ingresso riduttore	20 MPa	Dimensioni	220 x 180 x 110 mm
Pressione max. uscita	6,0 MPa	Peso	1,4 kg
Attacchi	1/4" SAE		



### Ricambi e accessori

**A**

**B**

**C**

**D**



Rif	Codice	Modello	Descrizione
<b>A</b>	07121016	PF80/53R1/TEST	Manometro test Ø80, classe 1.0 con settori definiti, indice di posizionamento e vite di regolazione
<b>B</b>	05015003	V/GYSA/1M-4/6Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 1/4" SAE 45°
<b>B</b>	05015010	V/GYSA/1M-5/6Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 5/16" SAE 45°
<b>C</b>	05015016	V/GYSS/1M-4/8Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 1/4" SAE diritto
<b>C</b>	05015017	V/GYSA/1M-5/8Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 5/16" SAE diritto
<b>D</b>	05015011	V/GYSS/4M-VE/Y/PF80/10/K1	Terminale per controllo vasi espansione caldaie
	05059023001	RG180/5-4-WIG	Adattatore 5/16" F x 1/4" M
	06071001003	GYSS/4-4/36/Y	Tubo flessibile 900 mm per kit azoto 1 lt. - 1/4" SAE
	06071025003	GYSS/4-4/98Y	Tubo flessibile 2500 mm per kit azoto 5 lt. - 1/4" SAE
	14020084001	95514K-WIG	Kit 10 guarnizione per riduttori azoto AZ200-50 e WN2-60 (lato connessione bombole)
	14020083001	OR-AZ/K-WIG	Kit 10 o-ring per riduttore azoto AZ200-50 (lato connessione cartucce 950 cc)
	10010037		Manometro ricambio AP 0-315 bar per AZ200-50 - 1/4" G
	10010038		Manometro ricambio BP 0-100 bar per AZ200-50 - 1/4" G
	14029064	VP/B16	Valigia completa di termoformato per kit azoto e azoidro

## AZ200

"Heavy duty" nitrogen regulator for cartridges and cylinders

Heavy duty professional nitrogen regulator with dual integrated connection for cartridges and cylinders (no external adapter required) and "High Performance" safety valve.

Code	Model	Country	Cylinder connection	Standard reference	Cartridge connection
10002017	AZ200-50	IT	W 21.7 x 1/14" M	UN 11144-5	M10x1
10002019	AZ200-50/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C	M10x1
10002018	AZ200-50/E	GB	G 5/8" M	BS 341 nr.3	-
10002020	AZ200-50/C	D	W 24.32 x 1/14" F	DIN 477 nr.10	M10x1



### Technical features

Regulator inlet pressure	20 MPa	Dimensions	380 x 200 x 130 mm
Max output pressure	4,8 MPa	Weight	1,8 kg
Connections	1/4" SAE		

## WN2-60

Nitrogen regulator

Regulator with connection for refillable Nitrogen or AZOIDRO cylinders.

Code	Model	Country	Connections bottle	Standard reference
10002035	WN2-60	IT	W 21.7 x 1/14" M	UN 11144-5
10002037	WN2-60/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C
10002036	WN2-60/E	GB	G 5/8" M	BS 341 nr.3
10002038	WN2-60/C	D	W 24.32 x 1/14" F	DIN 477 nr.10



### Technical features

Regulator inlet pressure	20 MPa	Dimensions	220 x 180 x 110 mm
Max output pressure	6,0 MPa	Weight	1,4 kg
Connections	1/4" SAE		



### Spare parts and accessories



Ref	Code	Model	Description
A	07121016	PF80/53R1/TEST	ø 80 test gauge, class 1,0 with defined sectors, positioning indicator and calibration screw
B	05015003	V/GYSA/1M-4/6Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 1/4" SAE 45°
B	05015010	V/GYSA/1M-5/6Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 5/16" SAE 45°
C	05015016	V/GYSS/1M-4/8Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 1/4" SAE straight
C	05015017	V/GYSA/1M-5/8Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 5/16" SAE straight
D	05015011	V/GYSS/4M-VE/Y/PF80/10/K1	Terminal for checking expansion vessel of boilers
	05059023001	RG180/5-4-WIG	Adapter 5/16" F x 1/4" M
	06071001003	GYSS/4-4/36/Y	Flexible hose 900 mm for nitrogen kit 1 l. - 1/4" SAE
	06071025003	GYSS/4-4/98Y	Flexible hose 2500 mm for nitrogen kit 5 l. - 1/4" SAE
	14020084001	95514K-WIG	Kit 10 gaskets for nitrogen regulator AZ200-50 and WN2-60 (cylinders connection side)
	14020083001	OR-AZ/K-WIG	Kit 10 o-ring for nitrogen regulator for AZ200-50 (cartridge connection side 950 cc)
	10010037		Replacement HP gauge-315 bar for AZ200-50 - 1/4" G
	10010038		Replacement LP gauge-100 bar for AZ200-50 - 1/4" G
	14029064	VP/B16	Plastic carrying case for 1 liter nitrogen/azoidro kits